


Alarm Cables

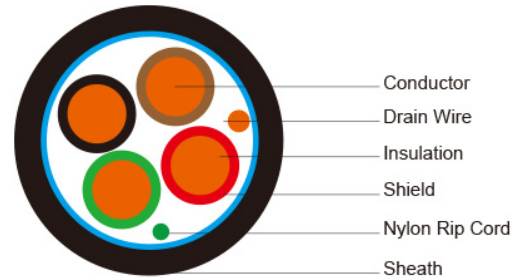

Application: Wiring of fire alarms, fire protective circuits, burglar alarms, smoke alarms, and voice communications.

Conductor Material: Solid bare copper

Insulation Material: PVC

Laying-up: Units

Drain Wire: Solid bare copper

Shield: Overall Al/Polyester foil

Nylon Rip Cord: 150D

Sheath Material: PVC/LSZH/PE

Sheath Color: As your request

Shape: Circular in cross-section

Voltage Rating: 300/500 voltage

Temperature Rating: 75°C

Part No.	No. of Conds.	AWG Size	Stranding	Nominal Insulation	Nominal Jacket	Nominal O.D. (Approx)
Fire Alarm Cables UE-AC-24/4	4	24.00	Solid	0.21mm	0.7mm	3.9mm
Fire Alarm Cables UE-AC-24/6	6	24.00	Solid	0.21mm	0.7mm	4.2mm
Fire Alarm Cables UE-AC-24/8	8	24.00	Solid	0.21mm	0.84mm	5.0mm
Fire Alarm Cables UE-AC-24/12	12	24.00	Solid	0.21mm	1.00mm	6.0mm

Fire Alarm Cables UE-AC-22/4	4	22.00	Solid	0.30mm	0.88mm	5.1mm
Fire Alarm Cables UE-AC-18/2	2	18.00	Solid	0.38mm	0.76mm	5.3mm
Fire Alarm Cables UE-AC-18/4	4	18.00	Solid	0.38mm	0.76mm	6.09mm
Fire Alarm Cables UE-AC-18/6	6	18.00	Solid	0.38mm	0.76mm	6.9mm
Fire Alarm Cables UE-AC-16/2	2	16.00	Solid	0.38mm	0.76mm	5.9mm
Fire Alarm Cables UE-AC-16/4	4	16.00	Solid	0.38mm	0.76mm	6.7mm
Fire Alarm Cables UE-AC-14/2	2	14.00	Solid	0.38mm	0.76mm	6.65mm
Fire Alarm Cables UE-AC-14/4	4	14.00	Solid	0.38mm	0.76mm	8.68mm