


**Multipair Overall Screened Cables-Belden  
Equivalent 8762**

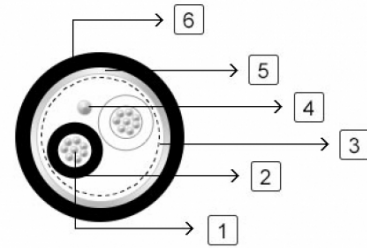

<b>Applications</b>	These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.	
<b>Construction</b>		
<b>Conductor</b>	Tinned copper wire.	
<b>Insulation</b>	PE	
<b>Two cores twisted into pairs.</b>		
<b>Drain Wire</b>	Tinned copper wire.	
<b>Overall Screen</b>	Aluminium/Polyester tape.	
<b>Sheath</b>	PVC (V type)/LSZH (H type).	
<b>Insulation Colour</b>	Black, Clear.	
<b>Electrical &amp; Mechanical Characteristics</b>		
<b>AWG</b>		20
<b>Conductor Construction</b>		7x0.32
<b>UL Style</b>		2092
<b>Maximum Conductor Resistance</b>	Ω/km	34.1
<b>Voltage Rating</b>	V	300
<b>Nominal Capacitance Conductor to Conductor</b>	pF/m	89
<b>Nominal Capacitance Conductor to Screen</b>	pF/m	161
<b>Bending Radius</b>		10xOverall Diameter
<b>Operating Temperature</b>	°C	-20~60

Dimensions

Part No.	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 8762V	1	0.41	0.71	5.2
UEBE 8762H	1	0.41	0.71	5.2