


**Multipair Overall Screened Cables-Belden
Equivalent 8719**

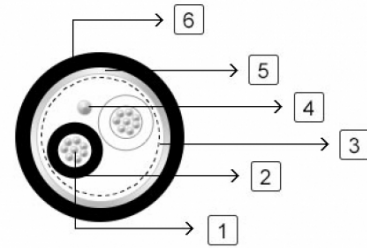

Applications These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

Construction	
Conductor	Tinned copper wire.
Insulation	PE
Two cores twisted into pairs.	
Drain Wire	Tinned copper wire.
Overall Screen	Aluminium/Polyester tape.
Sheath	PVC (V type)/LSZH (H type).
Insulation Colour	Black, Clear.

Electrical & Mechanical Characteristics		
AWG		16
Conductor Construction		19x0.29
UL Style		20253
Maximum Conductor Resistance	Ω/km	15.8
Voltage Rating	V	600
Nominal Capacitance Conductor to Conductor	pF/m	76
Nominal Capacitance Conductor to Screen	pF/m	144
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

Dimensions

Part No.	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 8719V	1	0.81	0.81	8.0
UEBE 8719H	1	0.81	0.81	8.0