


**Multipair Overall Screened Cables-Belden  
Equivalent 8720**

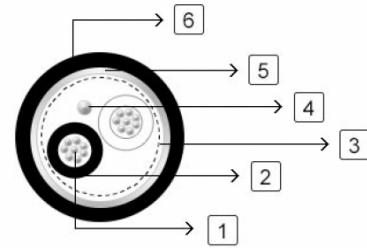

**Applications** These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

<b>Construction</b>	
<b>Conductor</b>	Tinned copper wire.
<b>Insulation</b>	PE
<b>Two cores twisted into pairs.</b>	
<b>Drain Wire</b>	Tinned copper wire.
<b>Overall Screen</b>	Aluminium/Polyester tape.
<b>Sheath</b>	PVC (V type)/LSZH (H type).
<b>Insulation Colour</b>	Black, Clear.

<b>Electrical &amp; Mechanical Characteristics</b>		
<b>AWG</b>		14
<b>Conductor Construction</b>		19x0.36
<b>UL Style</b>		20253
<b>Maximum Conductor Resistance</b>	Ω/km	10
<b>Voltage Rating</b>	V	600
<b>Nominal Capacitance Conductor to Conductor</b>	pF/m	76
<b>Nominal Capacitance Conductor to Screen</b>	pF/m	154
<b>Bending Radius</b>		10xOverall Diameter
<b>Operating Temperature</b>	°C	-20~80

Dimensions

Part No.	No. of Pairss	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 8720V	1	0.81	0.89	9.0
UEBE 8720H	1	0.81	0.89	9.0