


**Multipair Overall Screened Cables-Belden
Equivalent 8718**

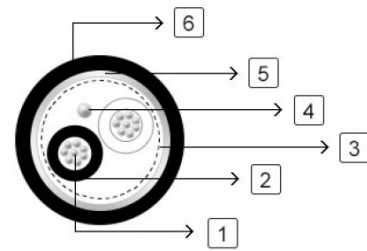

Applications	These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.
---------------------	--

Construction	
Conductor	Tinned copper wire.
Insulation	PE
Two cores twisted into pairs.	
Drain Wire	Tinned copper wire.
Overall Screen	Aluminium/Polyester tape.
Sheath	PVC (V type)/LSZH (H type).
Insulation Colour	Black, Clear.

Electrical & Mechanical Characteristics		
AWG		12
Conductor Construction		19x0.46
UL Style		20253
Maximum Conductor Resistance	Ω/km	8
Voltage Rating	V	600
Nominal Capacitance Conductor to Conductor	pF/m	82
Nominal Capacitance Conductor to Screen	pF/m	161
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

Dimensions

Part No.	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 8718V	1	0.94	0.86	10.2
UEBE 8718H	1	0.94	0.86	10.2