


**Multipair Individually Screened Cables-
Belden Equivalent 9729**

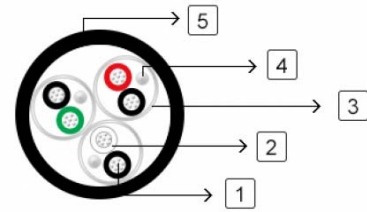

Applications	These cables have individually screened pairs laid up. Each individually screened pair has a 20AWG stranded tinned copper drain wire. These cables are used as computer cables.
Construction	
Conductor	Tinned copper wire.
Insulation	PP
Overall Screen	Aluminium/Polyester tape.
Drain Wire	Tinned copper wire.
Sheath	PVC/LSZH.
Insulation Colour	Black & Red, Black & White.

Electrical & Mechanical Characteristics		
AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	76
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

Dimensions				
Part No.	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter

		mm	mm	mm
UEBE 9729V	2	0.47	1.19	8.1
UEBE 9729H	2	0.47	1.19	8.1