


**Multipair Individually Screened Cables-
Belden Equivalent 9737**

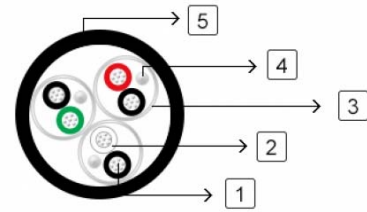

Applications	These cables have individually screened pairs laid up. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for RS-422 applications, used as computer cables.	
Construction		
Conductor	Tinned copper wire.	
Insulation	FoamPE.	
Individual Screen	Aluminium/Polyester tape.	
Drain Wire	Tinned copper wire.	
Sheath	PVC/LSZH.	
Insulation Colour	Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown, Red & Orange, Green & White, Green & Blue, Green & Yellow, Green & Brown, Green & Orange, White & Blue.	
Electrical & Mechanical Characteristics		
AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	76
Bending Radius		10xOverall Diameter

Operating Temperature

°C -20~60

Dimensions

Part No.	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 9737V	19	0.47	1.22	17.0
UEBE 9737H	19	0.47	1.22	17.0