


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8307

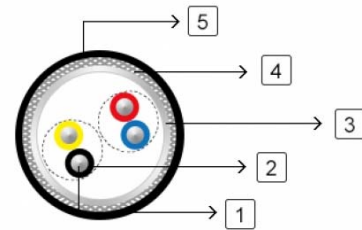

Applications These cables have pairs laid up in a foil/braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

Construction	
Conductor	Tinned copper wire.
Insulation	Semi Rigid PVC.
Overall Screen1	Aluminium/Polyester tape.
Overall Screen2	Tinned copper braid, 65% coverage.
Sheath	PVC/LSZH.
Insulation Colour	Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange.

Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	131
Nominal Capacitance Conductor to Screen	pF/m	236
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

Dimensions

Part No.	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
----------	--------------	----------------------	------------------	------------------

		mm	mm	mm
UEBE 8307V	7	0.25	0.81	8.8
UEBE 8307H	7	0.25	0.81	8.8