


**Multipair Overall Foil & Braid Screened  
Cables-Belden Equivalent 8310**

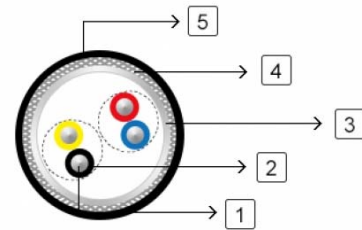

<b>Applications</b>	These cables have pairs laid up in a foil/braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.	
<b>Construction</b>		
<b>Conductor</b>	Tinned copper wire.	
<b>Insulation</b>	Semi Rigid PVC.	
<b>Overall Screen1</b>	Aluminium/Polyester tape.	
<b>Overall Screen2</b>	Tinned copper braid, 65% coverage.	
<b>Sheath</b>	PVC/LSZH.	
<b>Insulation Colour</b>	Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue.	
<b>Electrical &amp; Mechanical Characteristics</b>		
<b>AWG</b>		22
<b>Conductor Construction</b>		7x0.254
<b>UL Style</b>		2464
<b>Maximum Conductor Resistance</b>	Ω/km	54.8
<b>Voltage Rating</b>	V	300
<b>Nominal Capacitance Conductor to Conductor</b>	pF/m	115
<b>Nominal Capacitance Conductor to Screen</b>	pF/m	207
<b>Bending Radius</b>		10xOverall Diameter
<b>Operating Temperature</b>	°C	-30~80

**Dimensions**

Part No.	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
----------	--------------	----------------------	------------------	------------------

		mm	mm	mm
UEBE 8310V	10	0.25	0.81	11.2
UEBE 8310H	10	0.25	0.81	11.2