


**Multipair Overall Foil & Braid Screened
Cables-Belden Equivalent 8115**

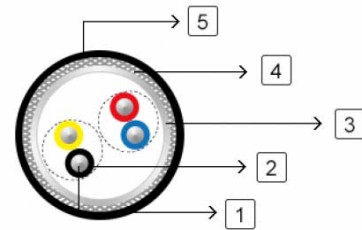

Applications	These cables have pairs laid up in a foil/braid screen. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.	
Construction		
Conductor	Tinned copper wire.	
Insulation	FoamPE.	
Overall Screen1	Aluminium/Polyester tape.	
Overall Screen2	Tinned copper braid, 65% coverage.	
Sheath	PVC/LSZH.	
Insulation Colour	White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red, Red/Orange & Orange/Red, Red/Green & Green/Red, Red/Brown & Brown/Red, Red/Gray & Gray/Red, Black/Blue & Blue/Black, Black/Orange & Orange/Black, Black/Green & Green/Black, Black/Brown & Brown/Black, Black/Gray & Gray/Black.	
Electrical & Mechanical Characteristics		
AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter

Operating Temperature

°C -30~80

Dimensions

Part No.	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 8115V	15	0.4	1.22	14.0
UEBE 8115H	15	0.4	1.22	14.0