


**Multicore Unscreened Armoured Cables-
Belden Equivalent 28538**

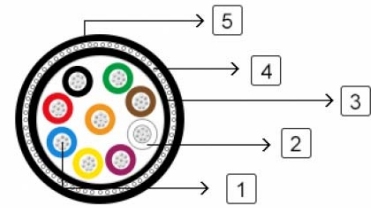

Applications	These multicore unscreened armoured cables are Type MC Metal Clad cables.
Construction	
Conductor	Bare copper wire.
Insulation	XLPE.
Inner Sheath	FR PVC.
Armour	Steel wire armour
Outer Sheath	FR PVC
Insulation Colour	Black, White, Red, Green, Brown, Blue, Orange, Yellow, Purple. Other colours are available upon your request.

Electrical & Mechanical Characteristics

AWG		12
Conductor Construction		7x20
Maximum Conductor Resistance	Ω/km	5
Voltage Rating	V	600
Bending Radius		13xOverall Diameter
Operating Temperature	°C	-40~90

Dimensions

Part No.	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
UEBE 28538V SWA	9	0.8	1.7	24..82