


Profibus SK Drag Chain(Track)

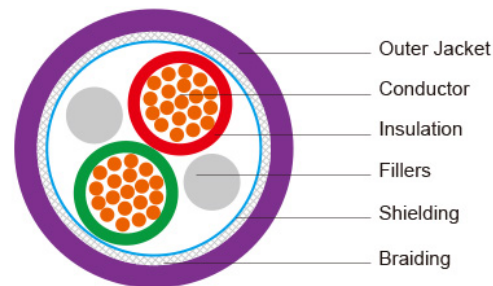

Application:

The application of these Profibus SK cables are in the cell and field area, just as for conventional types. The great advantage of this new system is the quick connection of the cable to the respective plugs. This type of processing also avoids errors. The above mentioned types are suitable for drag chains (stranded).

Construction:

Type/Area of Application	Drag Chain Applications
Cable Construction	1x2x0.64 mm (stranded)
Inner Conductor Diameter 1	Copper, bare (AWG 24/19)
Conductor Insulation	Foam-skin-PE
Conductor Colors	red, green
Stranding Element	2 conductors + filler
Shielding 1	Polyester foil over stranded bundle
Shielding 2	Polyester foil, aluminum-lined
Total Shielding	Copper braid, tinned
Outer Jacket Material	PUR
Outer Diameter	8.0 mm ± 0.4 mm
Outer Jacket Color	Violet

Electrical Data:

Characteristic Impedance @3-20MHz	150 Ω ± 10 Ω
Conductor Resistance	84.0 Ohm/km max.
Insulation Resistance	1.00 GOhm x km min.
Mutual Capacitance @1KHz	35.0 nF/km nom.

Working Voltage	300 V		
Test Voltage	1.5 KV		
Attenuation	9.6kHz	<	3dB/km
	38.4kHz	<	5dB/km
	4MHz	<	25dB/km
	16MHz	<	52dB/km

Technical Data:

Weight:	approximately 70.0 kg/km
Min. Bending Radius (Laying)	7.5 x OD mm
Operating Temp.Range, min.	- 40 °C
Operating Temp.Range, max.	+70 °C