


Foundation Fieldbus ISA/SP-50 Type B

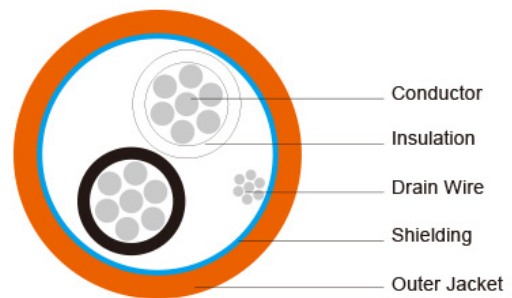

Application:

Foundation™ Field bus is used in intrinsically area, especially in the field of Process Automation. A single pair 22AWG Bi-Directional digital Fieldbus cable for type B applications (31.25 KBits/sec) are available in PVC, LSHF and SWA versions. Anti-termite and anti-vermin foundation fieldbus cable is also available.

Construction:

Type	Foundation Fieldbus ISA/SP-50 Type B
Inner Conductor	Tinned copper conductors 22AWG 0.34mm ²
Conductor Insulation	Polyolefin/Foamed PE with skin PE
Stranding Element	-
Shielding	Aluminium /polyester foil
Drain Wire	(22AWG) tinned copper
Outer Jacket Material	PVC
Core Identification	White & Black
Sheath Colour	Orange

Electrical Data:

Characteristic Impedance@31.25KHz	100 Ω±20 Ω
Conductor resistance	56.0Ohm/km @ 20°C
Working Voltage	300V
Test Voltage	1.5KV
Nominal attenuation	39kHz < 3dB/km

Technical Data:

Weight:	approximately 53 kg/km/ 213 kg/km(SWA)
----------------	--

Min. Bending Radius (Laying)	15 x OD mm
Operating Temp.Range, min.	- 25 °C
Operating Temp.Range, max.	+80 °C
