


## CU/XLPE/PVC/CT/PVC (4 Cores)

XLPE Insulated, PVC Bedded, Copper Tape Screened, PVC Sheathed Cable

### Application

These power cable for fixed installations such as distribution networks or industrial installations. Such as Plant engineering; Industrial machinery; Heating and air-conditioning systems; Power stations; Stage applications etc.

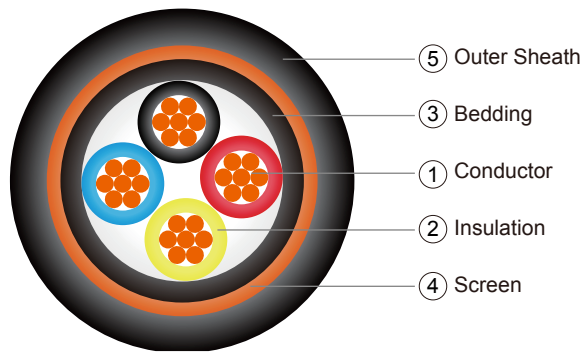

### Construction

- ① Conductor: Plain annealed copper, class1 solid or class 2 stranded circular, compacted or sectored.
- ② Insulation: Cross-linked polyethylene (XLPE) compound as per IEC 60502-1.

Insulation Colour:

Number of Cores	Color Code to IEC 60502-1	Color Code to BS 5467
4	Red, Yellow, Blue and Black	Blue, Brown, Black and Grey

Assembly: Cores cabled together with PP filler and covered with non-woven tape.

- ③ Bedding: Polyvinyl choride (PVC) compound type ST1 (80°C), ST2 (90°C) of IEC 60502-1.  
Bedding Colour: Black or other color as per customer request.
- ④ Screen: Copper tape.
- ⑤ Outer Sheath: Polyvinyl choride (PVC) compound type ST1 (80°C), ST2 (90°C) of IEC 60502-1.  
Outer Sheath Colour: Black or other color as per customer request.

### Electrical Characteristics

Recommended rated voltages  $U_0$

Highest system voltage ( $U_m$ ) (kV)	Rated voltage ( $U_0$ ) (kV)	
	Categories A and B	Category C
1,2	0,6	0,6

Routine test voltages

Rated voltage $U_0$ (kV)	0,6
Test voltage (kV)	3,5

Maximum conductor temperatures for different types of insulating compound

Maximum conductor temperature (°C)	
Normal operation	Short-circuit (5 s maximum duration)
90	250

Operating Temperature: -15°C to 90°C

Test Voltage: 3.5 kV for 5 minutes

### Reference Standards

Design Specification: IEC60502-1

Conductor: IEC60228, BS EN60228

Flame Retardancy: IEC60332-1, BS EN60332-1

### Installation Reference

Min.Bending Radius (mm): 8 x cable overall diameter

Max.Pulling Tension (N/mm<sup>2</sup>): 50

### CU/XLPE/PVC/CT/PVC (4 Cores)

XLPE Insulated, PVC Bedded, Copper Tape Screened, PVC Sheathed Cable

#### Dimension

Nominal Conductor Area (mm <sup>2</sup> )	No. and Diameter of Wires (no./mm)	Thickness of Insulation (mm)	Diameter Under Screen (mm)	Overall Diameter (mm)	Approx Net Weight (kg/km)
4x1.5	7/0.53	0.7	9.7	14.1	392
4x2.5	7/0.67	0.7	10.7	15.1	460
4x4	7/0.85	0.7	12.0	16.4	559
4x6	7/1.04	0.7	13.4	17.8	679
4x10	7/1.35	0.7	15.6	20.0	905
4x16	7/1.70	0.7	18.2	22.6	1207
4x25	7/2.14	0.9	22.3	26.7	1721
4x35	7/2.52	0.9	25.1	29.5	2178
4x50	19/1.78	1.0	25.4	30.0	2736
4x70	19/2.14	1.1	29.8	34.6	3748
4x95	19/2.52	1.1	33.5	39.1	5047
4x120	37/2.03	1.2	37.3	43.1	6256
4x150	37/2.25	1.4	42.8	49.0	7634
4x185	37/2.52	1.6	47.4	53.8	9361
4x240	61/2.25	1.7	54.7	61.5	12023
4x300	61/2.52	1.8	60.6	68.2	15025