


**450/750V & 600/1000V Mica+LSZH Insulated
Power Cables (Single Core)**

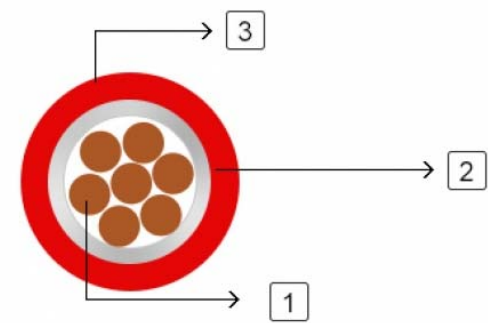

FR100 07MH-R (CU/MGT+LSZH 450/750V Class 2)
FR100 1MH-R (CU/MGT+LSZH 600/1000V Class 2)

Application:	This cable is used in fire extinguishing systems, sprinklers, control panels, and exit lights in high-rise buildings, hotels, hospitals, sub-ways, and public facilities.
STANDARDS:	Basic design to BS 7211

FIRE PERFORMANCE

Circuit Integrity	IEC 60331-21; BS 6387 CWZ; DIN VDE 0472-814(FE180); CEI 20-36/2-1; SS229-1; NBN C 30-004 (cat. F3); NF C32-070-2.3(CR1)
System circuit integrity	DIN 4102-12, E30 depending on lay system
Flame Retardance (Single Vertical Wire Test)	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1 ; NBN C 30-004 (cat. F1); NF C32-070-2.1(C2); CEI 20-35/1-2; EN 50265-2-1*; DIN VDE 0482-265-2-1*
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; NBN C 30-004 (cat. F2); NF C32-070-2.2(C1); CEI 20-22/3-4; EN 50266-2-4*; DIN VDE 0482-266-2-4
Halogen Free	IEC 60754-1; EN 50267-2-1; DIN VDE 0482-267-2-1; CEI 20-37/2-1 ; BS 6425-1*
No Corrosive Gas Emission	IEC 60754-2; EN 50267-2-2; DIN VDE 0482-267-2-2; CEI 20-37/2-2 ; BS 6425-2*
Minimum Smoke Emission	IEC 61034-1&2; EN 61034 -1&2; DIN VDE 0482-1034-1&2; CEI 20-37/3-1&2; EN 50268-1&2*; BS 7622-1&2*
No Toxic gases	NES 02-713; NF C 20-454

Note: Asterisk * denotes superseded standard.

VOLTAGE RATING

450/750V & 600/1000V

CABLE CONSTRUCTION

1. Conductor: Plain annealed copper wire, stranded according to IEC(EN) 60228 class 2
2. Fire Barrier: Mica glass tape
3. Insulation: Thermoplastic LSZH compound type LTS3 as per BS 7655-6.1 (Thermosetting LSZH compound type SW2-SW4 as per BS 7655-2.6 can be offered.)

COLOUR CODE

Insulation Colour: Orange (other colors upon request)

Physical AND THERMAL PROPERTIES

Temperature range during operation (fixed state): -30°C – +90°C

Temperature range during installation (mobile state): -20°C – +50°C

Minimum bending radius: 6 x Overall Diameter

Electrical PROPERTIES

Dielectric test:	600/1000V: 3500 V r.m.s. x 5' (core/core); 450/750V: 2500 V r.m.s. x 5' (core/core)
Insulation resistance	20 MΩ x km (at 20°C)
Short circuit temperature	250°C

CONSTRUCTION PARAMETERS

Conductor		FR100 07MH-R			FR100 1MH-R		
Nominal Cross Section Area	No./ Nominal Diameter of strands	Nominal Insulation Thickness	Nominal Overall Diameter	Approx. Weight	Nominal Insulation Thickness	Nominal Overall Diameter	Approx. Weight
mm ²	No./mm	mm	mm	kg/km	mm	mm	kg/km
1.5	7/0.53	0.7	3.5	25	0.8	3.8	30

2.5	7/0.67	0.8	4.1	35	0.8	4.2	40
4	7/0.85	0.8	4.6	52	1	5.3	70
6	7/1.04	0.8	5.2	72	1	6	96
10	7/1.35	1	6.5	120	1	6.6	130
16	7/1.70	1	7.6	180	1	7.7	200
25	7/2.14	1.2	9	275	1.2	9.1	290
35	7/2.52	1.2	10.2	370	1.2	10.3	390
50	19/2.52	1.4	11.8	500	1.4	11.9	520
70	19/2.14	1.4	13.4	700	1.4	13.5	730
95	19.2.52	1.6	15.8	980	1.6	15.9	990
150	37/2.52	1.8	18.8	1500	1.8	18.9	1520
185	37/2.52	2	21	1900	2	21.2	1900
240	37/2.52	2.2	25.7	2500	2.2	25.8	2550
300	37/2.52	2.4	28.6	3140	2.4	28.8	3150
400	61/2.85	2.6	32	4000	2.6	32.2	4000
500	61/3.20	2.8	35.5	5000	2.8	35.7	5000
630	127/2.52	2.8	39.5	6300	2.8	39.7	6360

Electrical PROPERTIES

Conductor Operating Temperature : 90°C

Ambient Temperature : 30°C

Current-Carrying Capacities (Amp)

Conductor crosssection area	Reference Method 4 (enclosed in conduit in thermally insulating wall etc)		Reference Method 3 (enclosed in conduit on a wall or in trunking etc)		Reference Method 1 (clipped direct)		Reference Method 11 (on a perforated cable tray, horizontal or vertical)		Reference Method 12 (free air)		
	2 cables, single-phase a.c. or d.c.	3 or 4 cables, 3-phase a.c.	2 cables, single-phase a.c. a.c. or d.c	3 or 4 cables, 3-phase a.c.	2 cables, single-phase a.c. or d.c. flat and touching	3 or 4 cables, 3-phase a.c. flat and touching or trefoil	2 cables, single - phase a.c. or d.c. or flat and touching	3 or 4 cables, 3-phase a.c. flat and touching or trefoil	Horizontal flat spaced	Vertical flat spaced	Trefoil
1	2	3	4	5	6	7	8	9	10	11	12
mm2	A	A	A	A	A	A	A	A	A	A	A
1.5	18	17	22	19	25	23	-	-	-	-	-
2.5	24	23	30	26	34	31	-	-	-	-	-
4	33	30	40	35	46	41	-	-	-	-	-
6	43	39	51	45	59	54	-	-	-	-	-
10	58	53	71	63	81	74	-	-	-	-	-
16	76	70	95	85	109	99	-	-	-	-	-
25	100	91	126	111	143	130	158	140	183	163	138
35	125	111	156	138	176	161	195	176	226	203	171
50	149	135	189	168	228	209	293	215	274	246	209
70	189	170	240	214	293	268	308	279	351	318	270
95	228	205	290	259	355	326	375	341	426	389	330
120	263	235	336	299	413	379	436	398	495	453	385
150	300	270	375	328	476	436	505	461	570	524	445
185	341	306	426	370	545	500	579	530	651	600	511
240	400	358	500	433	644	590	686	630	769	711	606
300	459	410	573	493	743	681	794	730	886	824	701
400	-	-	684	584	868	793	915	849	1065	994	820
500	-	-	783	666	990	904	1044	973	1228	1150	936
630	-	-	900	764	1130	1033	1191	1115	1423	1338	1069

Voltage Drop (Per Amp Per Meter)

Nominal Cross Section Area	2 cables d.c.	2 cables, single-phase a.c.						3 or 4 cables, 3-phase a.c.								
		Ref. Methods 3 and 4 (enclosed in conduit etc, in or on a wall)			Ref. Methods 1 and 11 (clipped direct or on trays touching)			Ref. Methods 3 and 4 (enclosed in conduit etc, in or on a wall)			Ref. Methods 1, 11 and 12 (in trefoil)			Ref. Methods 1 and 11 (Flat and touching)		
1	2	3			4			5			6			7		
mm ²	mV/A/m	mV/A/m			mV/A/m			mV/A/m			mV/A/m			mV/A/m		
1.5	31		31			27			27			27			27	
2.5	19		19			16			16			16			16	
4	33		12			10			10			10			10	
6	7.8		7.9			6.8			6.8			6.8			6.8	
10	4.7		4.7			4.7			4			4			4	
16	2.9		2.9			2.9			2.5			2.5			2.5	
		r	x	z	r	x	z	r	x	z	r	x	z	r	x	z
25	1.85	1.6	0.31	1.9	1.85	0.19	1.85	1.6	0.27	1.65	1.6	0.165	1.6	1.6	0.19	1.6
35	1.35	1.35	0.29	1.35	1.35	0.18	1.35	1.15	0.25	1.15	1.15	0.155	1.5	1.15	0.18	1.15
50	0.99	1	0.29	1.05	0.99	0.18	1	0.87	0.25	0.9	0.86	0.155	0.87	0.86	0.18	0.87
70	0.68	0.7	0.28	0.75	0.68	0.175	0.71	0.6	0.24	0.65	0.59	0.15	0.61	0.59	0.175	0.62
95	0.49	0.51	0.27	0.58	0.49	0.17	0.52	0.44	0.23	0.5	0.43	0.145	0.45	0.43	0.17	0.46
120	0.39	0.41	0.26	0.48	0.39	0.165	0.43	0.35	0.23	0.42	0.34	0.14	0.37	0.34	0.165	0.38
150	0.32	0.33	0.26	0.43	0.32	0.165	0.36	0.29	0.23	0.37	0.28	0.14	0.31	0.28	0.165	0.32
185	0.25	0.27	0.26	0.37	0.26	0.165	0.3	0.23	0.23	0.32	0.22	0.14	0.26	0.22	0.165	0.28
240	0.19	0.21	0.26	0.33	0.2	0.16	0.25	0.185	0.22	0.29	0.17	0.14	0.22	0.17	0.165	0.24
300	0.155	0.175	0.25	0.31	0.16	0.16	0.22	0.15	0.22	0.27	0.14	0.14	0.195	0.135	0.16	0.21
400	0.12	0.14	0.25	0.29	0.13	0.155	0.2	0.125	0.22	0.25	0.11	0.135	0.175	0.11	0.16	0.195
500	0.093	0.12	0.25	0.28	0.105	0.155	0.185	0.1	0.22	0.24	0.09	0.135	0.16	0.088	0.16	0.18
630	0.072	0.1	0.25	0.27	0.086	0.155	0.175	0.088	0.21	0.23	0.074	0.135	0.15	0.071	0.16	0.17

Note : r = conductor resistance at operating temperature

x = reactance

z = impedance