


300/500V LSZH Sheathed (multicore)

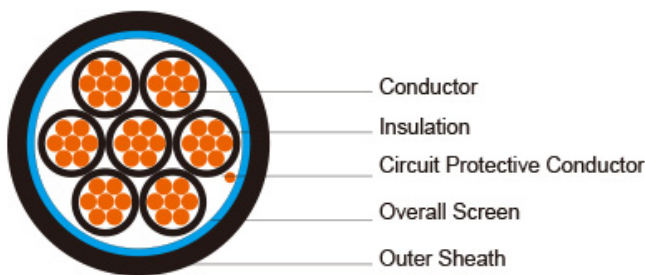

Application: The cables is mainly used in power stations, mass transit underground passenger systems, airports, petrochemical plants, hotels, hospitals, and high-rise buildings.

Standard: Basic design to BS 5308

FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test) EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1; CEI 20-35/1-2; EN 50265-2-1; DIN VDE 0482-265-2-1

Reduced Fire Propagation (Vertically-mounted bundled wires & cable test) EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; CEI 20-22/3-4; EN 50266-2-4; DIN VDE 0482-266-2-4

Halogen Free IEC 60754-1; EN 50267-2-1; DIN VDE 0482-267-2-1; CEI 20-37/2-1 ; BS 6425-1

No Corrosive Gas Emission IEC 60754-2; EN 50267-2-2; DIN VDE 0482-267-2-2; CEI 20-37/2-2 ; BS 6425-2

minimum Smoke Emission IEC 61034-1&2; EN 61034 -1&2; DIN VDE 0482-1034-1&2; CEI 20-37/3-1&2; EN 50268-1&2; BS 7622-1&2

No Toxic gases NES 02-713

VOLTAGE RATING

300/500V

CABLE CONSTRUCTION

Conductor: Plain annealed copper wire, stranded according to IEC(EN) 60228 class 2.

Insulation: Extruded cross-linked XLPE compound.

Filler, binder(if any): PP, Mylar tape

Circuit Protective Conductor: Annealed plain copper (class 2)

Overall Screen: Aluminium/polyester tape

Outer Sheath: Thermoplastic LSZH compound type LTS3 as per BS 7655-6.1 (Thermosetting LSZH compound type SW2-SW4 as per BS 7655-2.6 can be offered.)

COLOUR CODE

Insulation colour as per bs7671

with earth conductor

without earth conductor

2Cores

-

Brown,Blue

3Cores	Yellow/Green,Brown,Blue	Brown,Gray,Black
4Cores	Yellow/Green,Brown,Gray,Black	Brown,Gray,Black,Blue
5Cores	Yellow/Green,Brown,Gray,Black,Blue	Brown,Gray,Black,Blue,Black
above 5 Cores	Yellow/Green,Black Numbered	Black Numbered

sheath colour: Black

Physical AND THERMAL PROPERTIES

Temperature range during operation: Max.90°C for XLPE

250°C in short-circuit for 5s max.

Minimum bending radius: 6 x Overall Diameter

CONSTRUCTION PARAMETERS

Conductor								
No. of Core X Cross Section	No./Nominal Diameter of Strands	Nominal Overall Diameter Conductor	Nominal Insulation Thickness	Cross-Section Area Of Circuit Protective Conductor	Nominal Sheath Thickness	Nominal Overall Diameter	Max.Dc Resistance Of Conductor @20°C	Approx. Weight
Noxmm2	No./mm	mm	mm	mm ²	mm	mm	Ω/km	kg/km
7x1.0	7i0.44	1.32	0.6	1.0	1.0	11.2	18.1	186
7x1.5	7i0.53	1.59	0.7	1.5	1.1	12.9	12.1	253
7x2.5	7i0.67	2.01	0.8	2.5	1.2	14.9	7.41	365
12x1.5	7i0.53	1.59	0.7	1.5	1.2	16.8	12.1	404
12x2.5	7i0.67	2.01	0.8	2.5	1.4	19.8	7.41	595
19x1.5	7i0.53	1.59	0.7	1.5	1.3	19.7	12.1	600
19x2.5	7i0.67	2.01	0.8	2.5	1.5	23.2	7.41	885

Electrical PROPERTIES

Conductor Operating Temperature : 90°C

Ambient Temperature : 30°C

Current-Carrying Capacities (Amp)

Conductor cross-sectional area	Reference Method 4 (enclosed in conduit in thermally insulating wall etc)		Reference Method 3 (enclosed in conduit on a wall or in trunking etc)		Reference Method 1 (clipped direct)		Reference Method 11 (on a perforated cable tray, horizontal or vertical)		Reference Method 12 (free air)		
	2 cables, single phase a.c. or d.c.	3 or 4 cables, 3-phase a.c.	2 cables, single phase a.c. or d.c.	3 or 4 cables, 3-phase a.c.	2 cables, single-phase a.c. or d.c. flat and touching	3 or 4 cables, 3-phase a.c. flat and touching or trefoil	2 cables, single-phase a.c. or d.c. or flat and touching	3 or 4 cables, 3-phase a.c. flat and touching or trefoil	Horizontal flat spaced	Vertical flat spaced	Trefoil
1	2	3	4	5	6	7	8	9	10	11	12
mm ²	A	A	A	A	A	A	A	A	A	A	A
1.5	18	17	22	19	25	23	-	-	-	-	-
2.5	24	23	30	26	34	31	-	-	-	-	-

Voltage Drop (Per Amp Per Meter)

Nominal Cross Section Area	2 cables d.c.	2 cables, single-phase a.c.		3 or 4 cables, 3-phase a.c.		
		Ref. Methods 3 and 4 (enclosed in conduit etc, in or on a wall)	Ref. Methods 1 and 11 (clipped direct or on trays touching)	Ref. Methods 3 and 4 (enclosed in conduit etc, in or on a wall)	Ref. Methods 1, 11 and 12 (in trefoil)	Ref. Methods 1 and 11 (Flat and touching)
1	2	3	4	5	6	7
mm ²	mV/A/m	mV/A/m	mV/A/m	mV/A/m	mV/A/m	mV/A/m
1.5	31	31	27	27	27	27
2.5	19	19	16	16	16	16