


600/1000V LSZH Sheathed, Armoured (single core)

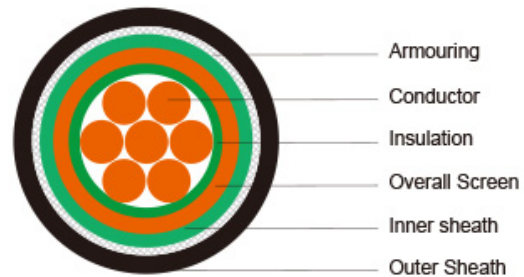

Application: This range of screened cables drastically reduce interferences from electrical noise, especially in Variable Speed Drive (VSD) applications and are manufactured with fixed conductors.

Standard: Basic design to IEC 60502-1

FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1; CEI 20-35/1-2; EN 50265-2-1; DIN VDE 0482-265-2-1
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; CEI 20-22/3-4; EN 50266-2- 4; DIN VDE 0482-266-2-4
Halogen Free	IEC 60754-1; EN 50267-2-1; DIN VDE 0482-267-2-1; CEI 20-37/2-1 ; BS 6425-1
No Corrosive Gas Emission	IEC 60754-2; EN 50267-2-2; DIN VDE 0482-267-2-2; CEI 20-37/2-2 ; BS 6425-2
minimum Smoke Emission	IEC 61034-1&2; EN 61034 -1&2; DIN VDE 0482-1034-1&2; CEI 20-37/3-1&2; EN 50268-1&2; BS 7622-1&2
No Toxic gases	NES 02-713

VOLTAGE RATING

600/1000V

CABLE CONSTRUCTION

Conductor: Plain annealed copper wire, stranded according to IEC(EN) 60228 class 2.

Insulation: Extruded cross-linked XLPE compound.

Inner sheath(optional): LSZH Compound

Armouring(optional): Aluminium Wire

Outer Sheath: Thermoplastic LSZH compound type LTS3 as per BS 7655-6.1 (Thermosetting LSZH compound type SW2-SW4 as per BS 7655-2.6 can be offered.)

COLOUR CODE

Insulation colour as per bs7671

	with earth conductor	without earth conductor
2Cores	-	Brown,Blue
3Cores	Yellow/Green,Brown,Blue	Brown,Gray,Black

4Cores	Yellow/Green,Brown,Gray,Black	Brown,Gray,Black,Blue
5Cores	Yellow/Green,Brown,Gray,Black,Blue	Brown,Gray,Black,Blue,Black
above 5 Cores	Yellow/Green,Black Numbered	Black Numbered

sheath colour: Black

Physical AND THERMAL PROPERTIES

Temperature range during operation: Max.90°C

250°C in short-circuit for 5s max.

Minimum bending radius: 8 x Overall Diameter (unarmoured cable)

10 x Overall Diameter (armoured cable)

CONSTRUCTION PARAMETERS

Conductor									
No. of Core Cross Section	No./ Nominal Diameter Of Strands	Nominal Insulation Thickness	Nominal Sheath Thickness	Diameter Under Screen	Diameter Over Inner Sheath	Armour Wire Diameter	Nominal Overall Diameter	Approx. Weight	
Noxmm2	No./mm	mm	mm	kg/km	mm	mm	mm	kg/km	
1x70	19/2.14	1.1	1.8	15.2	17.6	20.1	23.9	1400	
1x95	19/2.52	1.1	1.8	17.1	19.5	22.0	25.8	1700	
1x120	37/2.03	1.2	1.8	19.0	20.8	24.0	27.8	2000	
1x150	37/2.25	1.4	1.8	21.0	22.8	26.0	29.8	2400	
1x185	37/2.52	1.6	1.8	23.2	25.0	28.2	32.0	2800	
1x240	61/2.25	1.7	1.9	26.1	27.9	31.1	35.1	3500	
1x300	61/2.52	1.8	2.0	28.7	30.5	33.7	37.9	4200	
1x400	61/2.85	2.0	2.1	32.5	34.3	38.3	42.7	5400	
1x500	61/3.20	2.2	2.2	36.0	37.8	41.8	46.4	6500	
1x630	127/2.52	2.4	2.3	40.4	42.2	46.2	51.0	8200	
1x800	127/2.85	2.6	2.5	45.5	47.3	52.3	57.5	10400	
1x1000	127/3.20	2.8	2.7	50.4	52.2	57.2	62.4	13000	

Electrical PROPERTIES

Conductor Operating Temperature : 90°C

Ambient Temperature : 30°C

Current-Carrying Capacities (Amp)

Conductor cross-sectional area	Reference Method 4 (enclosed in thermally insulating wall)		Reference Method 3 (enclosed in conduit on a wall or in trunking etc)		Reference Method 12 (free air)	In ducts single-way		Laid direct in ground	
	2 cables, single phase a.c. or d.c.	3 or 4 cables, 3-phase a.c.	2 cables, single phase a.c. or d.c.	3 or 4 cables, 3-phase a.c.		2 cables, single phase a.c. or d.c.	3 or 4 cables, 3-phase a.c.	2 cables, single phase a.c. or d.c.	3 or 4 cables, 3-phase a.c.
1	2	3	4	5	6	7	8	9	10
mm ²	A	A	A	A	AA	A	A	AA	A
70	303	277	322	293	285	310	280	340	290
95	367	333	389	352	346	365	330	405	345
120	425	383	449	405	402	410	370	460	389
150	488	437	516	462	463	445	405	510	435
185	557	496	587	524	529	485	440	580	490
240	656	579	689	612	625	550	500	670	560
300	755	662	792	700	720	610	550	750	630
400	853	717	899	767	815	640	580	830	700
500	962	791	1016	851	918	690	620	910	770
630	1082	861	1146	935	1027	750	670	1000	840
800	1170	904	1246	987	1119	828	735	1117	931
1000	1261	961	1345	1055	1214	919	811	1254	1038

Voltage Drop (Per Amp Per Meter)

Conductor cross-sectional area	2 cables d.c.	2 cables singlephase a.c.		3 or 4 cables three-phase a.c.		2 cables singlephase a.c.		3 or 4 cables, 3-phase a.c. touching			
		Reference Method 1 & 11 (touching)		Reference Method 1, 11 & 12 (in trefoil touching)		Reference Method 1 & 11 (Flat touching)		In ducts	In ground	In ducts	In ground
1	2	3		4		5		6	7	8	9
mm ²	mV/A	mV/A/m		mV/A/m		mV/A/m		mV/A	mV/A	mV/A	mV/A

	/m										/m	/m	/m	/m
		r	x	z	r	x	z	r	x	z				
70	0.67	0.68	0.20	0.71	0.59	0.17	0.62	0.6	0.25	0.65	0.80	0.70	0.70	0.61
95	0.49	0.51	0.195	0.55	0.44	0.17	0.47	0.46	0.24	0.52	0.65	0.53	0.56	0.46
120	0.36	0.41	0.190	0.45	0.35	0.165	0.39	0.38	0.24	0.44	0.55	0.43	0.48	0.37
150	0.31	0.33	0.185	0.38	0.29	0.160	0.33	0.31	0.23	0.39	0.50	0.37	0.43	0.32
185	0.25	0.27	0.185	0.33	0.23	0.160	0.28	0.26	0.23	0.34	0.45	0.31	0.39	0.27
240	0.195	0.21	0.180	0.28	0.18	0.155	0.24	0.22	0.22	0.30	0.40	0.26	0.35	0.23
300	0.155	0.17	0.175	0.25	0.145	0.150	0.21	0.17	0.22	0.28	0.37	0.24	0.32	0.21
400	0.115	0.145	0.170	0.22	0.125	0.150	0.195	0.160	0.21	0.27	0.35	0.21	0.30	0.19
500	0.093	0.125	0.170	0.21	0.105	0.145	0.180	0.145	0.20	0.25	0.33	0.20	0.28	0.18
630	0.073	0.105	0.165	0.195	0.092	0.145	0.170	0.135	0.195	0.24	0.30	0.19	0.26	0.17
800	0.056	0.090	0.160	0.190	0.086	0.140	0.165	0.130	0.180	0.23	0.28	0.18	0.24	0.16
1000	0.045	0.092	0.155	0.180	0.080	0.135	0.155	0.125	0.170	0.21	0.26	0.17	0.22	0.15