


Flame Retardant CAT6 CWB/SWB/SWA Armoured Data Cables

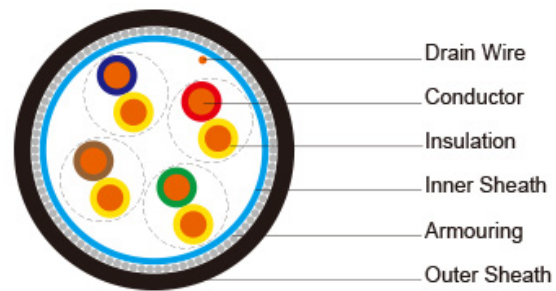

Application:

Cat6 Cable is a cable standard for Gigabit Ethernet and other network protocol, suitable for 10BaseT, 100BaseTx & 1000BaseT (Gigabit Ethernet) application. In addition, these cables can be offered with copper wire braid armoured & flame retardant outer sheath, providing additional mechanical protection still maintaining the flexibility of the cable.

STANDARDS:

Basic design adapted to EN50173

FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)

EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1; CEI 20-35/1-2; EN 50265-2-1; DIN VDE 0482-265-2-1

Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)

EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; CEI 20-22/3-4; EN 50266-2-4; DIN VDE 0482-266-2-4

VOLTAGE RATING

60V

CABLE CONSTRUCTION

Conductors: 23AWG solid bare copper.

Insulation: HDPE.

Twinning: Two coloured insulated conductors twisted together to form a pair.

Inner Sheath: Flame retardant, low smoke and halogen-free polyolefin, coloured black.

Armouring: cwb: copper Wire Braid

swb: Steel Wire Braid

swa: Steel Wire Armour

Outer Sheath: Thermoplastic PVC compound. UV resistance, hydrocarbon resistance, oil resistance, anti rodent and anti termite properties can be offered as option. Compliance to fire performance standard (IEC 60332-1, IEC 60332-3, UL 1581, UL 1666 etc) depends on the oxygen index of the PVC compound and the overall cable design. LSPVC can also be provided upon request.

Cat6 F/UTP: These cables have collective shielding of aluminium/Polyester tape with drain wire.

Cat6 SF/UTP: These cables have double collective shieldings of aluminium/Polyester tape & copper wire braid with drain wire.

Physical AND THERMAL PROPERTIES

Temperature range: -30°C ~ +75°C

Minimum bending radius during installation (mobile state): 8 x Overall Diameter

Minimum bending radius during operation (fixed state): 4 x Overall Diameter

Electrical Properties

AWG		23
Nominal Conductor Diameter	mm	0.56/0.57/0.58
Maximum DC Resistant@20°C	Ω/100m	9.38
Maximum DCR Unbalance	%	3
Maximum Mutual Capacitance	pF/m	5.8
Maximum Capacitance Unbalance	pF/100m	30
Characteristic Impedance@1-100MHz	Ω	100+/-15
Maximum Propagation Delay Skew	ns/100m	18

Transmission Properties

FREQ MHz	Maximum Attenuation dB/100m	Minimum NEXT dB	Minimum PSNEXT dB	Minimum ELFEXT dB/100m	Minimum PSELFEXT dB/100m	Minimum RL dB
0.772	1.8	76.0	74.	70.0	67.0	—
1	2.0	74.3	72.3	67.8	64.8	20.0
4	3.8	65.3	63.3	55.7	52.7	23.0
8	5.3	60.8	58.8	49.7	46.7	24.5
10	6.0	59.3	57.3	47.8	44.8	25.0
16	7.6	56.3	54.3	43.7	40.7	25.0
20	8.5	54.8	52.8	41.7	38.7	25.0
25	9.5	53.3	51.3	39.8	36.8	24.3
31.25	10.7	51.9	49.9	37.9	34.9	23.6
62.5	15.4	47.4	45.4	31.8	28.8	21.5
100	19.8	44.3	42.3	27.8	24.8	20.1
155	25.2	41.5	39.5	23.9	20.9	18.8
200	29.0	39.8	37.8	21.7	18.7	18.0
250	32.8	38.3	36.3	19.8	16.8	17.3

Cat6 SF/UTP

CONSTRUCTION PARAMETERS

Cable Code	Construction No. of elements×No. of cores in element×Conductor diameter	Nominal Insulation Thickness	Nominal Inner Sheath Thickness	Nominal Outer Sheath Thickness	Nominal Overall Diameter	Nominal Weight
	mm	mm	mm	mm	mm	kg/km
CAT6	4×2×0.56/0.57	0.2	0.6	1.0	7.88	115

U/UTP CWB						
CAT6 U/UTP SWB	4×2×0.56/0.57	0.2	0.6	1.0	7.88	109
CAT6 U/UTP SWA	4×2×0.56/0.57	0.2	0.6	1.0	8.88	189
CAT6 F/UTP CWB	4×2×0.57/0.58	0.2	0.6	1.0	8.48	126
CAT6 F/UTP SWB	4×2×0.57/0.58	0.2	0.6	1.0	8.48	132
CAT6 F/UTP SWA	4×2×0.57/0.58	0.2	0.6	1.0	9.48	213
CAT6 SF/UTP CWB	4×2×0.57/0.58	0.2	0.6	1.0	8.96	154
CAT6 SF/UTP SWB	4×2×0.57/0.58	0.2	0.6	1.0	8.96	148
CAT6 SF/UTP SWA	4×2×0.57/0.58	0.2	0.6	1.0	9.96	242