


Twisted Single Pair FEP Insulated

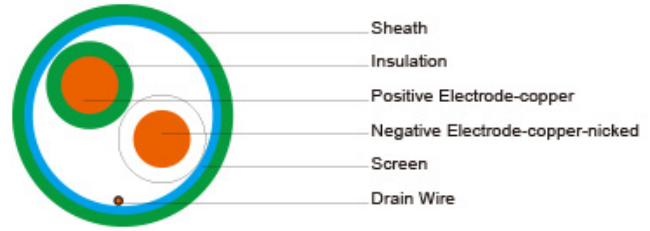

<b>Application:</b>	These cables are used with thermocouples for temperature measurements.
<b>Conductor:</b>	Solid. Material is according to thermocouple type.
<b>Insulation:</b>	FEP polymer
<b>Screen:</b>	Aluminum tape
<b>Drain wire:</b>	Tinned copper
<b>Outer sheath:</b>	FEP polymer
<b>Construction:</b>	Round
<b>Color code:</b>	According to IEC 60584-3

**K Type**

AWG(mm)	Insulation Material	Screen Material	Sheath Material	Max. Temp. (°C)	Nominal (mm)	O.D.	Weight (kg/km)
24 (0.51)	FEP Polymer	Aluminum tape	FEP Polymer	200	2.7		13.4
24 (7/0.2)	FEP Polymer	Aluminum tape	FEP Polymer	200	2.9		13.8
20 (0.81)	FEP Polymer	Aluminum tape	FEP Polymer	200	3.7		30.0
20 (7/0.32)	FEP Polymer	Aluminum tape	FEP Polymer	200	3.8		30.3