


Application:

Cables are used for vehicle constructions.

Standards/Specification:

ISO6722

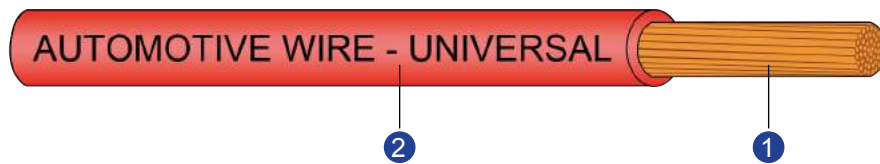

Construction:

- 1 Conductor: Soft-annealed electrolytic copper Cu-ETP1 according to DIN EN 13602, bare or tinned conductor construction according to ISO 6722.
- 2 Insulation: PVC

Product Features:

Voltage rating: 60 V d.c, 25 V a.c.

Temperature range: -40 °C to +105 °C (3000 h)



Technical Data:

Nominal Cross-Section (mm ²)	Strand NO./Max. Diameter (N/mm)	Nominal Insulation Thickness (mm)	Max. Overall Diameter (mm)	Resistance at 20°C max. (mΩ/m)
0.35	7/0.26	0.25	1.3	54.4
0.50	16/0.21	0.28	1.6	37.1
0.75	24/0.21	0.30	1.9	24.7
1.00	32/0.21	0.30	2.1	18.5
1.50	30/0.26	0.30	2.4	12.7
2.00	28/0.31	0.35	2.8	9.42
2.50	50/0.26	0.35	3.0	7.60
3.00	44/0.31	0.40	3.4	6.15
4.00	56/0.31	0.40	3.7	4.71
6.00	84/0.31	0.40	4.3	3.14
10.00	80/0.41	0.60	6.0	1.82
16.00	126/0.41	0.65	7.2	1.16
25.00	196/0.41	0.65	8.7	0.743