


**Multipair Overall Foil & Braid Screened
Cables-Belden Equivalent 9832**

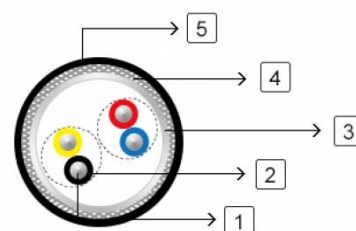

Applications	These cables have pairs laid up in a foil/braid screen, suitable for RS 232 & RS 422 applications.		
Construction			
Conductor	Tinned copper wire.		
Insulation	PE		
Overall Screen1	Aluminium/Polyester tape.		
Overall Screen2	Tinned copper braid, 65% coverage.		
Sheath	PVC/LSZH.		
Insulation Colour	White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White.		
Electrical & Mechanical Characteristics			
AWG			24
Conductor Construction			7x0.2
UL Style			2919
Maximum Conductor Resistance	Ω/km		85
Voltage Rating	V		30
Nominal Capacitance Conductor to Conductor	pF/m		42
Nominal Capacitance Conductor to Screen	pF/m		76
Bending Radius			10xOverall Diameter
Operating Temperature	°C		-30~80

Dimensions

Part No.	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
----------	--------------	----------------------	------------------	------------------

		mm	mm	mm
UEBE 9832V	5	0.38	0.81	8.6
UEBE 9832H	5	0.38	0.81	8.6