


450/750V LSZH Sheathed, Screened (2-4cores)

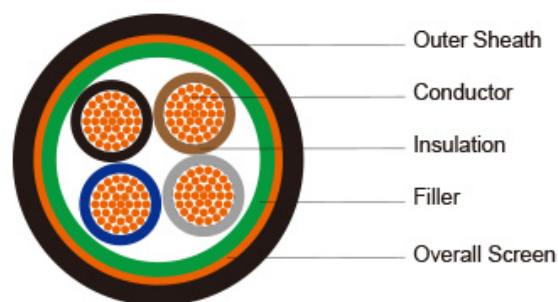

Application: The cables are mainly used in power stations, mass transit underground passenger systems, airports, petrochemical plants, hotels, hospitals, and high-rise buildings.

Standard: Basic design to BS 7211; IEC 60502-1

FIRE PERFORMANCE

Flame Retardance (Single Vertical Wire Test)	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1; CEI 20-35/1-2; EN 50265-2-1; DIN VDE 0482-265-2-1
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; CEI 20-22/3-4; EN 50266-2-4; DIN VDE 0482-266-2-4
Halogen Free	IEC 60754-1; EN 50267-2-1; DIN VDE 0482-267-2-1; CEI 20-37/2-1 ; BS 6425-1
No Corrosive Gas Emission	IEC 60754-2; EN 50267-2-2; DIN VDE 0482-267-2-2; CEI 20-37/2-2 ; BS 6425-2
minimum Smoke Emission	IEC 61034-1&2; EN 61034 -1&2; DIN VDE 0482-1034-1&2; CEI 20-37/3-1&2; EN 50268-1&2; BS 7622-1&2
No Toxic gases	NES 02-713

VOLTAGE RATING

450/750V

CABLE CONSTRUCTION

Conductor: Plain annealed copper wire, stranded according to IEC(EN) 60228 class 2.

Insulation: Extruded cross-linked XLPE compound.

Filler, binder (if any): PP, PET

Outer Sheath: Thermoplastic LSZH compound type LTS3 as per BS 7655-6.1 (Thermosetting LSZH compound type SW2-SW4 as per BS 7655-2.6 can be offered.)

COLOUR CODE

Insulation colour as per bs7671

	with earth conductor	without earth conductor
2Cores	-	Brown,Blue
3Cores	Yellow/Green,Brown,Blue	Brown,Gray,Black
4Cores	Yellow/Green,Brown,Gray,Black	Brown,Gray,Black,Blue

5Cores	Yellow/Green,Brown,Gray,Black,Blue	Brown,Gray,Black,Blue,Black
above 5 Cores	Yellow/Green,Black Numbered	Black Numbered

sheath colour: Black

Physical AND THERMAL PROPERTIES

Temperature range during operation: Max.90°C for XLPE

250°C in short-circuit for 5s max.

Minimum bending radius: 6 x Overall Diameter

CONSTRUCTION PARAMETERS

Conductor											
No. of Core X Cross Section	No./ Nominal Diameter Of Strands	Nominal Overall Diameter Conductor	Nominal Insulation Thickness	Nominal Copper Tape Thickness	Nominal Sheath Thickness	Nominal Overall Diameter	Max.Dc Resistanc e Of Conductor @20°C	Approx . Weight			
Noxmm 2	No./mm	mm	mm	mm	mm	mm	Ω/km	kg/km			
2x1.0	7/0.44	1.32	0.7	0.1	1.2	10.7	18.1	172			
2x1.5	7/0.53	1.59	0.7	0.1	1.3	11.3	12.1	197			
2x2.5	7/0.67	2.01	0.7	0.1	1.3	12.2	7.41	239			
2x4.0	7/0.85	2.55	0.7	0.1	1.3	13.4	4.61	300			
3x1.0	7/0.44	1.32	0.7	0.1	1.3	11.2	18.1	194			
3x1.5	7/0.53	1.59	0.7	0.1	1.3	11.8	12.1	224			
3x2.5	7/0.67	2.01	0.7	0.1	1.3	12.8	7.41	276			
3x4.0	7/0.85	2.55	0.7	0.1	1.3	14.1	4.61	353			
4x1.0	7/0.44	1.32	0.7	0.1	1.3	12.0	18.1	224			
4x1.5	7/0.53	1.59	0.7	0.1	1.4	12.7	12.1	261			
4x2.5	7/0.67	2..01	0.7	0.1	1.3	13.9	7.41	326			
4x4.0	7/0.85	2.55	0.7	0.1	1.3	15.3	4.61	422			

Electrical PROPERTIES

Conductor Operating Temperature : 90°C

Ambient Temperature : 30°C

Current-Carrying Capacities (Amp)

Conductor crosssectional area	Reference Method 4 (enclosed in conduit in thermally insulating wall etc)		Reference Method 3 (enclosed in conduit on a wall or in trunking etc)		Reference Method 1 (clipped direct)		Reference Method 11 (on a perforated cable tray, horizontal or vertical)		Reference Method 12 (free air)		
	2 cable s, single - phas e a.c. or d.c.	3 or 4 cable s, 3- phas e a.c.	2 cable s, single - phas e a.c. or d.c	3 or 4 cable s, 3- phas e a.c.	2 cables, single- phase a.c. or d.c. flat and touchi ng	3 or 4 cables, 3- phase a.c. flat and touchi ng or trefoil	2 cables, single- phase a.c. or d.c. or flat and touchi ng	3 or 4 cables, 3- phase a.c. flat and touchi ng or trefoil	Horizontal flat spaced	Vertical flat spaced	Trefoil
1	2	3	4	5	6	7	8	9	10	11	12
mm2	A	A	A	A	A	A	A	A	A	A	A
1.5	18	17	22	19	25	23	-	-	-	-	-
2.5	24	23	30	26	34	31	-	-	-	-	-
4	33	30	40	35	46	41	-	-	-	-	-

Voltage Drop (Per Amp Per Meter)

Nominal Cross Section Area	2 cables d.c.	2 cables, single-phase a.c.		3 or 4 cables, 3-phase a.c.		
		Ref. Methods 3 and 4 (enclosed in conduit etc, in or on a wall)	Ref. Methods 1 and 11 (clipped direct or on trays touching)	Ref. Methods 3 and 4 (enclosed in conduit etc, in or on a wall)	Ref. Methods 1, 11 and 12 (in trefoil)	Ref. Methods 1 and 11(Flat and touching)
1	2	3	4	5	6	7
mm2	mV/A/m	mV/A/m	mV/A/m	mV/A/m	mV/A/m	mV/A/m
1.5	31	31	27	27	27	27
2.5	19	19	16	16	16	16
4	33	12	10	10	10	10