


**1.9/3.3kV, 3.3/3.3kV HF-EPR Insulated, SW2/SW4 Sheathed Armoured Flame
Retardant Power & Control Cables**

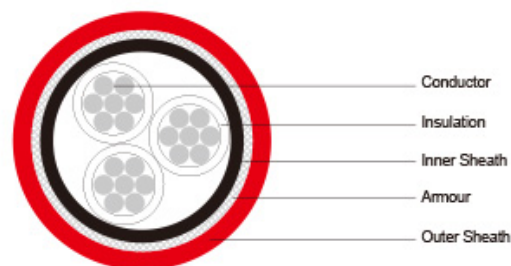

Application:

These medium voltage elastomeric insulated cables are designed for fixed wiring in ships and on mobile offshore units, suitable for use in power and control applications.

Standards:

BS 6883; IEC 60332-3A Flame retardant; IEC 60754-1; IEC 60754-2 Corrosivity; IEC 61034-2 Smoke density; Cold bend and impact (-40°C) (on request) CSA C22.2 No. 38-95 (on request)

Construction:

Conductor: Tinned copper wire stranded circular cl. 2 BS 6360/IEC 60228.
Insulation: HF-EPR GP5 according to BS 7655 1.2.
Inner Sheath: Halogen free thermosetting compound SW4 according to BS 7655 2.6 or reduced halogen thermosetting compound SW2 according to BS 7655 2.6.
Armour: Galvanized steel wire braid or tinned bronze wire braid (single core).
Outer Sheath: Halogen free thermosetting compound SW4 according to BS 7655 2.6 or reduced halogen thermosetting compound SW2 according to BS 7655 2.6.

**Mechanical and Thermal
Properties:**

Minimum Internal Bending Radius: 6×OD

Temperature Range: -40°C ~ +90°C

Dimensions and Weight

1.9/3.3kV

Constructi on No. of cores×Cro ss section(m m ²)	Nominal Insulatio n Thickne ss mm	Nominal Inner Sheath Thickne ss mm	Minimu m Diamet er Over Inner Sheath mm	Maximu m Diamete r Over Inner Sheath mm	Nomina l Armour Wire Diamet er mm	Nominal Outer Sheath Thickne ss mm	Minimu m Overall Diamet er mm	Maximu m Overall Diamete r mm	Appro x. Weigh t kg/km
1×10	2.2	1.1	10.2	11.9	0.3	1.3	14.2	16.2	398
1×16	2.2	1.2	11.4	13.1	0.3	1.3	15.4	17.6	499
1×25	2.2	1.2	13.0	14.8	0.3	1.4	17.1	19.5	675
1×35	2.2	1.3	14.1	15.9	0.3	1.4	18.2	20.6	793
1×50	2.2	1.3	15.3	17.2	0.3	1.5	19.6	22.4	970
1×70	2.2	1.4	17.2	19.2	0.3	1.6	21.7	24.6	1269
1×95	2.4	1.5	19.4	21.9	0.3	1.7	24.2	27.2	1623

1×120	2.4	1.6	21.3	23.8	0.3	1.7	26.0	29.1	1983
1×150	2.4	1.6	22.8	25.4	0.45	1.8	28.4	31.6	2423
1×185	2.4	1.7	24.8	27.4	0.45	1.9	30.6	34.3	2917
1×240	2.4	1.8	27.5	30.3	0.45	2.0	33.5	37.3	3654
1×300	2.4	1.9	30.0	33.2	0.45	2.1	36.2	40.1	4428
1×400	2.6	2.0	33.8	37.1	0.45	2.3	40.3	44.8	5416
1×500	2.8	2.2	37.6	41.1	0.45	2.5	44.5	49.2	6726
1×630	2.8	2.3	41.2	45.2	0.45	2.6	48.4	53.6	8562
3×10	2.2	1.5	20.4	22.9	0.3	1.7	25.1	28.2	1052
3×16	2.2	1.6	22.8	25.3	0.3	1.8	27.7	30.8	1357
3×25	2.2	1.8	26.6	29.3	0.45	2.0	32.6	36.3	2032
3×35	2.2	1.8	28.4	31.2	0.45	2.1	34.6	38.5	2382
3×50	2.2	1.9	31.2	34.4	0.45	2.2	37.6	41.6	2936
3×70	2.2	2.1	35.3	38.7	0.45	2.4	42.1	46.7	3877
3×95	2.4	2.3	40.2	44.1	0.45	2.6	47.4	52.1	4995
3×120	2.4	2.4	44.0	48.1	0.45	2.7	51.4	56.7	6118
3×150	2.4	2.6	47.6	51.8	0.45	2.9	55.3	60.8	7284
3×185	2.4	2.7	51.7	56.4	0.45	3.0	59.6	65.7	8750
3×240	2.4	3.0	57.7	62.9	0.45	3.3	66.2	72.6	11118
3×300	2.4	3.2	63.1	68.6	0.45	3.5	72.0	79.0	13531

3.3/3.3kV

Constructi on No. of cores×Cro ss section(m m²)	Nominal Insulatio n Thickne ss mm	Nominal Inner Sheath Thickne ss mm	Minimu m Diamet er Over Inner Sheath mm	Maximu m Diamete r Over Inner Sheath mm	Nomina l Armour Wire Diamet er mm	Nominal Outer Sheath Thickne ss mm	Minimu m Overall Diamet er mm	Maximu m Overall Diamete r mm	Appro x. Weigh t kg/km
1×10	3.0	1.2	12.0	13.7	0.3	1.4	16.1	18.4	483
1×16	3.0	1.2	13.0	14.7	0.3	1.4	17.1	19.4	579
1×25	3.0	1.3	14.7	16.7	0.3	1.5	19.1	21.5	774
1×35	3.0	1.3	15.6	17.6	0.3	1.5	19.9	22.8	885
1×50	3.0	1.4	17.0	19.0	0.3	1.6	21.5	24.4	1082
1×70	3.0	1.5	18.9	21.0	0.3	1.6	23.4	26.4	1377
1×95	3.0	1.5	20.6	23.1	0.3	1.7	25.3	28.4	1699
1×120	3.0	1.6	22.5	25.0	0.3	1.8	27.4	30.5	2081
1×150	3.0	1.7	24.1	26.8	0.45	1.9	30.0	33.6	2550
1×185	3.0	1.7	26.0	28.6	0.45	2.0	32.0	35.7	3032

1×240	3.0	1.8	28.7	31.8	0.45	2.1	34.8	38.7	3780
1×300	3.0	1.9	31.2	34.4	0.45	2.2	37.6	41.5	4563
1×400	3.0	2.1	34.7	38.1	0.45	2.3	41.3	45.8	5514
1×500	3.2	2.2	38.4	41.9	0.45	2.5	45.3	50.0	6807
1×630	3.2	2.4	42.2	46.2	0.45	2.6	49.4	54.6	8691
3×10	3.0	1.7	24.1	26.7	0.45	1.9	29.9	33.6	1404
3×16	3.0	1.8	26.5	29.2	0.45	2.0	32.5	36.2	1738
3×25	3.0	1.9	30.1	33.2	0.45	2.1	36.3	40.2	2314
3×35	3.0	2.0	32.1	35.4	0.45	2.2	38.5	42.9	2701
3×50	3.0	2.1	34.9	38.3	0.45	2.3	41.5	46.0	3278
3×70	3.0	2.2	38.9	42.7	0.45	2.5	45.8	50.5	4226
3×95	3.0	2.4	42.9	46.9	0.45	2.7	50.2	55.5	5297
3×120	3.0	2.5	46.7	50.9	0.45	2.8	54.2	59.7	6442
3×150	3.0	2.7	50.3	54.9	0.45	3.0	58.2	64.2	7631
3×185	3.0	2.8	54.4	59.2	0.45	3.2	62.7	68.9	9158
3×240	3.0	3.1	60.4	65.7	0.45	3.4	69.1	76.0	11526