


Three Core Cables to IEC 60502

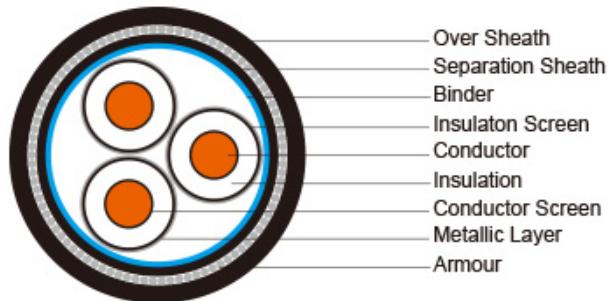

The three core cables are designed for distribution of electrical power with nominal voltage U_0/U ranging from 1.8/3KV to 26/35KV and frequency 50Hz. They are suitable for installation mostly in power supply stations, indoors and in cable ducts, outdoors, underground and in water as well as for installation on cable trays for industries, switchboards and power stations.

Application:

IEC 60502 Part 1(1.8/3KV)

IEC 60502 Part 2(3.6/6KV to 18/30KV)

Conductor:

Plain annealed copper or aluminium complying with IEC 60228 class 1 or 2.

Conductor Screen:

The conductor screen consists of an extruded layer of non metallic, semi-conducting compound applied on top of a semi-conducting tape. The conductor screen is applied under triple extrusion process over the conductor along with the insulation and the insulation screen. The extruded semi-conducting compound is firmly bonded to the insulation to exclude all air voids and can be easily hand stripped on site. The conductor screen is not necessary for both PVC and EPR/HEPR insulated 1.8/3.6KV and 3.6/6KV cables.

Insulation:

Insulation is of polyvinyl chloride (PVC) intended for 1.8/3.6KV and 3.6/6KV cables, cross-linked polyethylene compound (XLPE) or ethylene propylene rubber (EPR/ HEPR).

Table 1. Insulation Thickness Of XLPE Or EPR/HEPR Insulation

Nom. Cross Secti on Area	1.8/3kV (Um=3.6) kV	Insulation Thickness at Nom. Voltage							
		3.6/6kV (Um=7.2)kV		6/10KV (Um=12 KV)	8.7/15KV (Um=17 KV)	12/20KV (Um=24 KV)	18/30KV (Um=36 KV)	21/35KV (Um=42 KV)	26/35KV (Um=42 KV)
		mm ²	mm	mm	mm	mm	mm	mm	mm
	XLPE/EP R	XLP E	EPR	Unscree ned	Screen ed	XLPE/E PR	XLPE/E PR	XLPE/E PR	XLPE/E PR
10	2.0	2.5	3.0	2.5	-	-	-	-	-
16	2.0	2.5	3.0	2.5	3.4	-	-	-	-
25	2.0	2.5	3.0	2.5	3.4	4.5	-	-	-
35	2.0	2.5	3.0	2.5	3.4	4.5	5.5	-	-
50 – 185	2.0	2.5	3.0	2.5	3.4	4.5	5.5	8.0	9.3
									10.5

240	2.0	2.6	3.0	2.6	3.4	4.5	5.5	8.0	9.3	10.5
300	2.0	2.8	3.0	2.8	3.4	4.5	5.5	8.0	9.3	10.5
400	2.0	3.0	3.0	3.0	3.4	4.5	5.5	8.0	9.3	10.5
500 - 1600	2.2-2.8	3.2	3.2	3.2	3.4	4.5	5.5	8.0	9.3	10.5

Insulation Screen: The insulation screen consists of an extruded layer of non metallic, semi-conducting compound extruded over the insulation of each core. The extruded semi-conducting layer shall consist of bonded or cold strippable semi-conducting compound capable of removal for jointing or terminating. As an option, a semi-conducting tape may be applied over the individual cores or core assembly as a bedding for the metallic layer. The minimum thickness is 0.3 mm and the maximum resistivity is 500 Ohm-m at 90°C. The screen is tightly fitted to the insulation to exclude all air voids and can be easily hand stripped on site. The insulation screen is not necessary for both PVC and EPR/HEPR insulated 1.8/3.6KV and 3.6/6KV cables. The screen may be covered by semi-conductive water blocking swellable tape to ensure longitudinal watertightness. **Inner Covering & Fillers:** For cables with a collective metallic layer or cables with a metallic layer over each individual cores with additional collective metallic layers, semi-conducting inner covering and fillers shall be applied over the laid up cores. The inner covering and fillers are made of non hygroscopic material like polypropylene, except if the cable is to be made longitudinally watertight. The inner covering is extruded in general but may be lapped if the interstices between the cores are filled. The approximate thickness of extruded inner coverings is given in Table 2:

Table 2. Approximate Thickness Of Extruded Inner Coverings

Fictitious Diameter Over Laid Up Cores	Approx. Thickness of Extruded Inner Covering	
mm	mm	
>	<	
-	25	1.0
25	35	1.2
35	45	1.4
45	60	1.6
60	80	1.8
80	-	2.0

*The approximate thickness of lapped inner coverings shall be 0.4mm for fictitious diameters over the laid up cores up to and including 40mm and 0.6mm for larger diameter.

Metallic Layer: The metallic layer may be applied over the individual cores or the core assembly collectively. The following types of metallic layers are provided: 1) Metallic Screen 2) Concentric Conductor 3) Metallic Sheath 4) Metallic Armour. The metallic screen shall consist of either copper tapes or a concentric layer of copper wires or a combination of tapes and wires. The concentric conductor is applied directly over the inner covering. The metallic sheath consists of lead or lead alloy applied as a tightly fitting seamless tube. The metallic armour consists of either flat wire armour, round wire armour, and double tape armour. **Table 3.** Minimum Total Cross Section Of Metallic Screen

Nom. Cross-Section Area of Cable	Min. Cross-Section of Metallic Screen	DC Resistance of the Copper Wire Screen
mm ²	mm ²	mm

up to 120	16	1.06
150-300	25	0.72
400-630	35	0.51
800-1000	50	0.35

Separation Sheath (for armoured cable): The separation sheath comprises a layer of extruded PVC, PE or LSZH applied over the laid up cores under the armour. PVC is normally of grade ST2 and PE of grade ST7. The nominal thickness is calculated by $0.02Du + 0.6\text{mm}$ where Du is the fictitious diameter under the sheath in mm. For cables without a lead sheath, the nominal separation sheath thickness shall not be less than 1.2mm. For cables where the separation sheath is applied over the lead sheath, the nominal separation sheath thickness shall not be less than 1.0mm. **Tabel 4.** Separation Thickness

Cores Diameter		Approx. Thickness of Inner Sheath
mm		mm
>	<	
35	45	1.4
45	60	1.6
60	80	1.8
80	-	2.0

Lapped Bedding (for armoured lead sheathed cable): The lapped bedding applied to the lead sheath consists of either impregnated/synthetic compounded paper tapes or a combination of two layers of these paper tapes followed by a few layers of compounded fabulous materials. The thickness is around 1.5mm. **Armour (for armoured cable):** The armour is applied over the inner covering helically. It consists of either flat galvanized steel wire armour (strip), round galvanized steel wire armour, and double steel tape armour. **Table 5.** Round Armour Wire Diameter

Fictitious Diameter Under the Armour		Armour Wire Diameter
mm		mm
>	<	
-	10	1.25
10	15	1.25
15	25	1.6
25	35	2.0
35	60	2.5
60	-	3.15

Table 6. Armour Tape Thickness

Fictitious Diameter Under the Armour		Galvanized Steel / Steel	Aluminum / Aluminium Alloy
mm		mm	mm
>	<		
-	30	0.2	0.5
30	70	0.5	0.5

70

-

0.8

0.8

For flat wire armour and fictitious diameter under the armour greater than 15mm, the nominal thickness of the flat steel wire diameter shall be 0.8mm. Cables with fictitious diameter under the armour up to and including 15mm, flat wire armour will not be used. The tape armour is applied helically in two layers so that the outer tape is approximately central over the gap of the inner tape. If tape armour is used, the inner covering shall be reinforced by taped bedding. **Over**

Sheath: Overall sheath comprises a layer of extruded either thermoplastic compound (PVC ST3 type or PE ST7 type) or elastomeric compound (polychlorprene CSP or chlorosulfonated PE). The nominal oversheath thickness is calculated by $0.035D+1$ where D is the fictitious diameter immediately under the oversheath in mm. For unarmoured cables and cables with the oversheath not applied over the armour, metallic screen or concentric conductor, the nominal oversheath thickness shall not be less than 1.4mm. And for cables with oversheath applied over the armour, metallic screen or concentric conductor, the nominal oversheath thickness shall not be less than 1.8mm.

PHYSICAL PROPERTIES: Operating Temperature: up to 70°C (PVC insulation); up to 90°C (XLPE or EPR

insulation) **Temperature Range:** -5°C (PVC sheath); -20°C (PE sheath) **Short Circuit Temperature(5 seconds**

maximum duration): 140-160 °C (PVC insulation); 250°C (XLPE or EPR insulation) **Bending Radius:** 15 x OD **Table**

7. Nominal /Operating /Testing Voltages

Rated Voltage Uo/U	Operating Voltage (Um)	Testing Voltage (rms)
1.8/3KV	3.6KV	6.5KV
3.6/6KV	7.2KV	12.5KV
6/10KV	12KV	21KV
8.7/15KV	17.5KV	30.5KV
12/20KV	24KV	42KV
18/30KV	36KV	63KV
21/35KV	42KV	73.5(53)*KV
26/35KV	42KV	91(65)*KV

*21/35KV and 26/35kV power frequency voltage test can be made under the following conditions: 2.5Uo x 30mins or 3.0Uo x 15mins. Numbers in brackets refer to the test values for 3.0Uo x 1.5mins.

Three Core 1.8/3KV (Um=3.6KV) Dimensional Data

Nom. Cross Section Area	Unarmoured Cables				Steel Round-Wire Armoured Cables							
	Nom. Insula- tion Thickness	Copper Tape Thickness	Copper Wire Sc- reen Area*	Nom. Sheat- h Thickness	Appro- x. Overa- ll Diam- eter	CU AL	Nom. Beddi- ng Thickn- ess	Arm our Wire Size	Nom. Sheat- h Thickness	Appro- x. Overa- ll Diam- eter	CU AL	
mm ²	mm	mm	mm ²	mm	mm	kg/km	mm	mm	mm	mm	kg/km	

10	2.0	0.1	16	1.8	23	650	460	1.2	1.6	1.8	28	148 0	129 0
16	2.0	0.1	16	1.8	24	840	540	1.2	1.6	1.9	29	172 0	141 0
25	2.0	0.1	16	1.8	26	116 0	680	1.2	1.6	1.9	32	213 0	165 0
35	2.0	0.1	16	1.8	29	149 0	820	1.2	2.0	2.1	36	281 0	214 0
50	2.0	0.1	16	1.9	32	190 0	100 0	1.2	2.0	2.2	39	334 0	245 0
70	2.0	0.1	16	2.0	36	258 0	129 0	1.2	2.0	2.3	42	420 0	291 0
95	2.0	0.1	16	2.2	40	344 0	164 0	1.3	2.5	2.4	47	562 0	382 0
120	2.0	0.1	16	2.3	43	422 0	195 0	1.3	2.5	2.5	51	658 0	431 0
150	2.0	0.1	25	2.4	46	509 0	229	1.4	2.5	2.7	54	768 0	487 0
185	2.0	0.1	25	2.5	50	624 0	273 0	1.5	2.5	2.8	58	906 0	556 0
240	2.0	0.1	25	2.7	56	803 0	343 0	1.6	2.5	3.0	64	112 00	660 0
300	2.0	0.1	25	2.8	60	989 0	410 0	1.6	2.5	3.1	69	135 90	750 0
400	2.0	0.1	35	3.1	68	125 30	515 0	1.8	3.15	3.4	78	172 60	988 0
500	2.2	0.1	35	3.3	75.7	166 80	751 0	1.8	3.15	3.5	84.3	217 80	130 25
630	2.4	0.1	35	3.5	84.9	217 70	100 40	1.8	3.15	3.8	94.6	274 00	160 50

*Optional wire screen can be provided in combination of copper tapes. Nominal screen area, as stated in the table, can be supplied as standard.

Nom. Cross	Steel Flat Wire Armoured Cables						Double Steel Tape Armoured Cables					
	Nom. Beddin	Armo ur	Nom.She ath	Approx	Approx.	Weight	Nom. Beddin	No of Steel	Nom.She ath	Approx	Approx. Weight	

Section Area	g Thickne ss	Wire Size	Thicknes s	Overall Diamet er	CU	AL	g Thickne ss	Tapes x Nom	Thicknes s	Overall Diamet er	CU	AL
	mm2	mm	mm	mm			kg/km	mm	mm	mm		
10	1.2	0.8	1.8	24.5	124 5	106 5	1.2	2 x 0.2	1.8	23.6	925	750
16	1.2	0.8	1.8	27.1	156 5	128 0	1.2	2 x 0.2	1.8	26.2	120 5	925
25	1.2	0.8	1.8	29.7	197 5	152 5	1.2	2 x 0.2	1.9	29.0	159 0	114 5
35	1.2	0.8	1.9	32.5	242 0	180 5	1.2	2 x 0.2	1.9	31.6	198 5	137 0
50	1.2	0.8	2.0	35	286 0	208 0	1.2	2 x 0.2	2.0	34.1	240 0	160 5
70	1.2	0.8	2.1	38.7	368 5	252 5	1.2	2 x 0.5	2.2	39.5	357 0	241 0
95	1.3	0.8	2.2	42.9	469 5	308 0	1.3	2 x 0.5	2.3	43.7	457 0	295 0
120	1.3	0.8	2.3	46.4	565 0	358 5	1.3	2 x 0.5	2.4	46.1	551 0	344 0
150	1.4	0.8	2.4	49.6	663 0	408 5	1.4	2 x 0.5	2.6	50.6	650 0	395 5
185	1.5	0.8	2.6	54.1	799 0	482 0	1.5	2 x 0.5	2.7	54.9	782 5	465 0
240	1.6	0.8	2.7	59.2	100 60	579 0	1.6	2 x 0.5	2.8	60.0	982 5	560 0
300	1.6	0.8	2.9	64.6	122 30	686 5	1.6	2 x 0.5	3.0	65.4	120 30	666 0
400	1.8	0.8	3.1	71.0	152 00	828 0	1.8	2 x 0.5	3.2	71.8	149 70	805 5
500	1.8	0.8	3.3	79.5	190 90	102 55	1.8	2 x 0.8	3.5	80.5	188 80	100 35
630	1.8	0.8	3.6	89.8	244 00	129 20	1.8	2 x 0.8	3.8	92.3	250 70	136 20

Electrical Data

Nom. Cross-Sectio n Area	D C Resistanc e CU / AL	A C Resistanc e CU / AL	Short Circuit Rating of Conductor CU / AL 1 sec	Capaci - tance	Chargin g Current	Short Circuit Rating of Copper Wire Screen Per Core 1 sec	Short Circuit Rating of Copper Tape Screen Per Core 1 sec	Reactanc e	Inductanc e
mm ²	μΩ/m	μΩ/m	kA	pF/m	mA/m	kA	kA	μΩ/m	nH/m
10	1830/3080	2330/3920	1.4/0.9	160	0.25	2.6	0.4	101	390
16	1150/1910	1460/2420	2.2/1.4	180	0.27	2.6	0.4	98	370
25	727/1200	929/1538	3.6/2.3	220	0.29	2.6	0.4	95	350
35	524/868	668/1113	5.0/3.2	250	0.31	2.6	0.5	92	330
50	387/641	494/822	6.8/4.4	270	0.33	2.6	0.5	88	310
70	268/443	343/568	9.8/6.3	310	0.35	2.6	0.6	84	290
95	193/320	248/410	13.3/8.5	350	0.38	2.6	0.6	81	270
120	153/253	196/325	17.2/11.0	380	0.46	2.6	0.7	79	250
150	124/206	159/265	21.2/13.5	420	0.50	2.6	0.7	77	260
185	99.1/164	128/211	26.6/17.0	460	0.56	2.6	0.8	76	250
240	75.4/125	98/161	34.9/22.3	510	0.61	4.3	0.9	74	240
300	60.1/100	80/130	43.8/28.0	570	0.68	4.3	1.0	73	250
400	47.0/77.8	64/102	57.3/36.6	590	0.70	5.8	1.1	71	240
500	36.6/60.5	57/81	72.3/46.2	610	0.72	5.8	1.2	69	230
630	28.3/46.9	42/64	91.2/58.3	630	0.74	5.8	1.3	67	220

Three Core 3.8/6.6KV (Um=7.2KV) Dimensional Data

Nom . Cros s-Secti on Area	Unarmoured Cables						Steel Round-Wire Armoured Cables						
	Nom. Insulati on Thickn ess	Coppe r Tape Thickn ess	Copper Wire Sc reen Area*	Nom. Sheath Thickn ess	Appro x. Overa ll Diam eter	CU AL	Approx. We ight	Nom. Beddin g Thickn ess	Arm our Wire Size	Nom. Sheath Thickn ess	Appro x. Overa ll Diam eter	CU AL	Approx. Weight
mm ²	mm	mm	mm ²	mm	mm	kg/km	mm	mm	mm	mm	kg/km		
10	2.5	0.1	16	2.0	30	980	790	1.2	2.0	2.1	36	231 0	212 0
16	2.5	0.1	16	2.0	31	119 0	890	1.2	2.0	2.2	38	260 0	229 0

25	2.5	0.1	16	2.1	34	156 0	108 0	1.2	2.0	2.3	41	308 0	260 0
35	2.5	0.1	16	2.2	37	193 0	127 0	1.3	2.5	2.4	45	395 0	328 0
50	2.5	0.1	16	2.3	40	237 0	148 0	1.3	2.5	2.5	47	453 0	363 0
70	2.5	0.1	16	2.4	43	311 0	182 0	1.4	2.5	2.6	51	551 0	421 0
95	2.5	0.1	16	2.5	47	400 0	220 0	1.5	2.5	2.8	55	666 0	486 0
120	2.5	0.1	16	2.6	50	482 0	255 0	1.5	2.5	2.9	59	763 0	536 0
150	2.5	0.1	25	2.8	54	577 0	297 0	1.6	2.5	3.0	62	880 0	600 0
185	2.5	0.1	25	2.9	58	696 0	346 0	1.6	2.5	3.1	66	101 80	667 0
240	2.6	0.1	25	3.1	65	894 0	434 0	1.8	3.15	3.4	75	134 80	887 0
300	2.8	0.1	25	3.3	70	109 80	519 0	1.9	3.15	3.6	81	159 20	101 30
400	3.0	0.1	35	3.5	79	138 20	644 0	2.0	3.5	3.9	90	199 80	125 90
500	3.2	0.1	35	3.7	87	191 00	107 55	2.1	3.5	4.1	98	241 60	148 20
630	3.2	0.1	35	4.0	95	304 70	131 50	2.2	3.5	4.4	107	296 50	177 10

*Optional wire screen can be provided in combination of copper tapes. Nominal screen area, as stated in the table, can be supplied as standard.

Nom. Cross - Secti on Area	Steel Flat Wire Armoured Cables						Double Steel Tape Armoured Cables					
	Nom. Beddin g Thickne ss	Armo ur Wire Size	Nom.She ath Thicknes s	Approx Overall Diamet er	CU	AL	Nom. Beddin g Thickne ss	No of Steel tapes x nom tape thickne ss	Nom.She ath Thicknes s	Approx Overall Diamet er	CU	AL
mm ²	mm	mm	mm	mm	kg/km		mm	mm	mm	mm	kg/km	
10	1.2	0.8	1.8	26.9	141 5	123 5	1.2	2X0.2	1.8	26	106 0	885

16	1.2	0.8	1.8	29.2	172 5	144 5	1.2	2X0.2	1.8	28.3	134 0	105 5
25	1.2	0.8	1.9	32.2	216 5	173 5	1.2	2X0.2	1.9	31.3	173 5	130 5
35	1.3	0.8	2.0	35.0	264 5	202 5	1.3	2X0.2	2.0	34.1	217 0	155 5
50	1.3	0.8	2.1	37.4	307 5	229 5	1.3	2X0.5	2.1	38.0	295 0	217 0
70	1.4	0.8	2.2	41.0	391 5	275 5	1.4	2X0.5	2.3	41.8	379 5	263 5
95	1.5	0.8	2.3	45.3	484 0	333 5	1.5	2X0.5	2.4	46.1	481 0	320 0
120	1.5	0.8	2.4	48.7	591 5	385 5	1.5	2X0.5	2.5	49.5	577 0	370 5
150	1.6	0.8	2.5	52.1	693 0	439 5	1.6	2X0.5	2.6	52.9	677 5	423 5
185	1.6	0.8	2.6	56.2	826 5	510 0	1.6	2X0.5	2.8	57.2	812 0	495 0
240	1.8	0.8	2.8	62.2	104 40	622 0	1.8	2X0.5	2.9	63.0	102 50	602 5
300	1.9	0.8	3.0	68.2	127 80	742 0	1.9	2X0.5	3.1	69.0	125 70	720 0
400	2.0	0.8	3.3	75.9	159 70	911 0	2.0	2X0.5	3.4	76.7	157 40	887 0
500	2.1	0.8	3.5	84.2	199 40	111 30	2.1	2X0.8	3.6	86.5	205 50	117 50
630	2.2	0.8	3.7	93.5	251 20	136 70	2.2	2X0.8	3.9	96.0	258 30	144 00

Electrical Data

Nom . Cross- Sectio n Area	D C Resistanc e CU / AL	A C Resistanc e CU / AL	Short Circuit Rating of Conduct or CU / AL 1 sec	Capac i- tance	Chargin g Current	Short Circui t Rating of Coppe r Wire Scree n Per Core 1 sec	Short Circui t Rating of Coppe r Tape Scree n Per Core 1 sec	Reactan ce	Inductan ce
mm ²	µΩ/m	µΩ/m	kA	pF/m	mA/m	kA	kA	µΩ/m	nH/m

10	1830/3080	2330/3920	1.4/0.9	212	0.27	2.6	0.4	132	410
16	1150/1910	1470/2420	2.2/1.4	242	0.30	2.6	0.4	124	390
25	727/1200	927/1538	3.6/2.3	272	0.33	2.6	0.4	116	370
35	524/868	668/1113	5.0/3.2	301	0.36	2.6	0.5	108	350
50	387/641	494/822	6.8/4.4	332	0.40	2.6	0.5	102	330
70	268/443	343/568	9.8/6.3	383	0.46	2.6	0.6	97	310
95	193/320	248/410	13.3/8.5	432	0.52	2.6	0.6	92	290
120	153/253	196/325	17.2/11.0	474	0.57	2.6	0.7	89	280
150	124/206	159/265	21.2/13.5	511	0.61	4.3	0.7	87	280
185	99.1/164	128/211	26.6/17.0	562	0.67	4.3	0.8	86	270
240	75.4/125	98/161	34.9/22.3	602	0.72	4.3	0.9	83	260
300	60.1/100	80/130	43.8/28.0	622	0.75	4.3	1.0	82	260
400	47.0/77.8	64/102	57.3/36.6	648	0.78	5.8	1.1	80	250
500	36.6/60.5	51/81	72.3/46.2	668	0.82	5.8	1.2	78	250
630	28.3/46.9	42/64	91.2/58.3	758	0.92	5.8	1.3	76	240

Three Core 3.8/6.6KV (Um=7.2KV) Dimensional Data

Nom. Cross- Section Area	Unarmoured Cables				Steel Round-Wire Armoured Cables								
	Nom. Insula- tion Thickn- ess	Copper Tape Thickn- ess	Copper Wire Sc- reen Area*	Nom. Sheath Thickn- ess	Appro- x. Overa- ll Diam- eter	Approx. Weight		Nom. Beddin- g Thickn- ess	Arm- our Wire Size	Nom. Sheath Thickn- ess	Appro- x Overa- ll Diam- eter	Approx. Weight	
mm ²	mm	mm	mm ²	mm	mm	kg/km		mm	mm	mm	mm	kg/km	
16	3.4	0.1	16	2.2	36	141	111	1.2	2.0	2.4	42	300	270
25	3.4	0.1	16	2.3	39	180	132	1.3	2.5	2.5	46	390	343
35	3.4	0.1	16	2.3	41	217	150	1.3	2.5	2.6	49	443	377
50	3.4	0.1	16	2.4	44	263	173	1.4	2.5	2.7	52	508	419
70	3.4	0.1	16	2.6	48	340	211	1.5	2.5	2.8	56	605	475
95	3.4	0.1	16	2.7	52	431	251	1.5	2.5	2.9	60	718	538
120	3.4	0.1	16	2.8	55	515	289	1.6	2.5	3.0	63	823	596

150	3.4	0.1	25	2.9	58	610 0	330 0	1.7	2.5	3.1	67	938 0	658 0
185	3.4	0.1	25	3.0	62	731 0	381 0	1.7	3.15	3.3	72	116 10	811 0
240	3.4	0.1	25	3.2	69	929 0	468 0	1.8	3.15	3.5	79	141 10	951 0
300	3.4	0.1	25	3.3	73	112 40	545 0	1.9	3.15	3.7	84	164 20	106 30
400	3.4	0.1	35	3.6	81	140 40	666 0	2.0	3.5	3.9	92	206 20	128 80
500	3.4	0.1	35	3.7	88	178 30	845 0	2.1	3.5	4.0	99.	250 90	165 30
630	3.4	0.1	35	3.9	96	200 30	108 95	2.2	3.5	4.1	109	308 80	196 70

*Optional wire screen can be provided in combination of copper tapes. Nominal screen area, as stated in the table, can be supplied as standard.

Nom. Cross - Secti on Area	Steel Flat Wire Armoured Cables						Double Steel Tape Armoured Cables					
	Nom. Bedding Thickne ss	Armo ur Wire Size	Nom. Sheath Thickne ss	Approx . Overall Diamet er	Approx. Weight		Nom. Bedding Thickne ss	No of Steel tapes x nom tape thickne ss	Nom. Sheath Thickne ss	Approx . Overall Diamet er	Approx. Weight	
					CU	AL					CU	AL
mm ²	mm	mm	mm	mm	kg/km		mm	mm	mm	mm	kg/km	
16	1.2	0.8	2.2	39.7	2795	2515	1.2	2x0.5	2.3	40.5	2680	2395
25	1.3	0.8	2.2	42.7	3305	2885	1.3	2x0.5	2.4	43.7	3195	2775
35	1.3	0.8	2.3	45.2	3835	3215	1.3	2x0.5	2.5	46.2	3720	3100
50	1.4	0.8	2.4	47.8	4325	3570	1.4	2x0.5	2.6	48.8	4200	3445
70	1.5	0.8	2.5	51.8	5320	4185	1.5	2x0.5	2.7	52.8	5185	4050
95	1.5	0.8	2.7	56.1	6450	4875	1.5	2x0.5	2.8	56.9	6280	4700
120	1.6	0.8	2.8	59.7	7545	5510	1.6	2x0.5	2.9	60.5	7360	5325
150	1.7	0.8	2.9	63.1	8610	6150	1.7	2x0.5	3.0	63.9	8420	5950
185	1.7	0.8	3.0	67.4	1012 0	6995	1.7	2x0.5	3.1	68.2	9910	6780
240	1.8	0.8	3.2	73.0	1243 0	8205	1.8	2x0.5	3.3	73.8	1220 0	7970
300	1.9	0.8	3.3	78.3	1477 5	9455	1.9	2x0.5	3.4	79.1	1453 0	9200

400	2.0	0.8	3.5	85.2	1795 0	1119 0	2.0	2x0.8	3.7	87.7	1860 0	1185 0
500	2.1	0.8	3.7	92.8	2197 0	1327 0	2.1	2x0.8	3.9	95.3	2268 0	1399 0
630	2.2	0.8	4.0	102.7	2748 0	1616 0	2.2	2x0.8	4.1	105.0	2820 0	1691 0

Electrical Data

Nom. Cross-Sectio n Area	D C Resistanc e CU / AL	A C Resistanc e CU / AL	Short Circuit Rating of Conductor CU / AL 1 sec	Capaci -tance	Chargin g Current	Short Circuit Rating of Copper Wire Screen Per Core 1 sec	Short Circuit Rating of Copper Wire Screen Per Core 1 sec	Reactanc e	Inductanc e
mm ²	μΩ/m	μΩ/m	kA	pF/m	mA/m	kA	kA	μΩ/m	nH/m
16	1150/1910	1470/2420	2.2/1.4	186	0.40	2.6	0.5	131	410
25	727/1200	927/1538	3.6/2.3	216	0.43	2.6	0.5	123	390
35	524/868	668/1113	5.0/3.2	237	0.47	2.6	0.6	115	370
50	387/641	494/822	6.8/4.4	266	0.52	2.6	0.6	109	350
70	268/443	343/568	9.8/6.3	298	0.60	2.6	0.7	103	330
95	193/320	248/410	13.3/8.5	334	0.67	2.6	0.7	99	320
120	153/253	196/325	17.2/11.0	365	0.73	2.6	0.8	96	310
150	124/206	159/265	21.2/13.5	392	0.78	4.3	0.8	93	300
185	99.1/164	128/211	26.6/17.0	430	0.86	4.3	0.9	90	290
240	75.4/125	98/161	34.9/22.3	476	0.95	4.3	0.9	87	280
300	60.1/100	80/130	43.8/28.0	524	1.05	4.3	1.0	85	270
400	47.0/77.8	64/102	57.3/36.6	580	1.16	5.8	1.1	81	260
500	36.6/60.5	51/81	72.3/46.2	630	1.26	5.8	1.2	78	250
630	28.3/46.9	42/64	91.2/58.3	690	1.36	5.8	1.3	76	240

Three Core 8.7/15KV (Um=17.5KV) Dimensional Data

Nom. Cros	Unarmoured Cables							Steel Round-Wire Armoured Cables				
	Nom. Insulati	Copper Tape	Copp er	Nom. Sheath	Appro x.	Approx. Weight	Nom. Beddin	Armo ur	Nom. Sheath	Appro x.	Approx. Weight	

Section Area	Nom. Cross - Section Area	Nom. Bedding Thickness	Armour Wire Size	Nom. Sheath Thickness *	Overall Diameter	CU	AL	kg/km	Nom. Bedding Thickness	Wire Size	Nom. Sheath Thickness	Overall Diameter	CU	AL
mm2	mm	mm	mm2	mm	mm	kg/km	mm	mm	mm	mm	kg/km	mm2	mm	mm
25	4.5	0.1	16	2.4	44	2100	1620	1.4	2.5	2.7	52	4560	4080	
35	4.5	0.1	16	2.5	46	2510	1840	1.4	2.5	2.7	54	5080	4410	
50	4.5	0.1	16	2.6	49	2980	2080	1.5	2.5	2.9	57	5740	4840	
70	4.5	0.1	16	2.7	53	3760	2470	1.6	2.5	3.0	62	6770	5480	
95	4.5	0.1	16	2.8	57	4700	2900	1.6	2.5	3.1	65	7890	6100	
120	4.5	0.1	16	3.0	60	5590	3320	1.7	2.5	3.2	69	8970	6700	
150	4.5	0.1	25	3.1	64	6560	3760	1.8	3.15	3.4	74	11030	8220	
185	4.5	0.1	25	3.2	67	7800	4300	1.8	3.15	3.5	78	12490	8980	
240	4.5	0.1	25	3.4	74	9820	5220	1.9	3.15	3.7	84	15040	10440	
300	4.5	0.1	25	3.5	79	11800	6010	2.0	3.5	3.8	90	17920	12130	
400	4.5	0.1	35	3.7	86	14620	7240	2.1	3.5	4.1	98	21360	13970	
500	4.5	0.1	35	3.8	93	18160	9355	2.2	3.5	4.3	106	26490	17830	

*Optional wire screen can be provided in combination of copper tapes. Nominal screen area, as stated in the table, can be supplied as standard.

Nom. Cross - Section Area	Steel Flat Wire Armoured Cables						Double Steel Tape Armoured Cables					
	Nom. Bedding Thickness	Armour Wire Size	Nom. Sheath Thickness	Approx. Overall Diameter	CU	AL	Nom. Bedding Thickness	No of Steel tapes x Nom Tape Thickness	Nom. Sheath Thickness	Approx. Overall Diameter	CU	AL

mm ²	mm	mm	mm	mm	kg/km		mm	mm	mm	mm	kg/km
25	1.4	0.8	2.4	48.0	3915	3495	1.4	2x0.5	2.5	48.8	3770 3345
35	1.4	0.8	2.5	50.8	4510	3890	1.4	2x0.5	2.6	51.6	4350 3735
50	1.5	0.8	2.6	53.3	5020	4270	1.5	2x0.5	2.7	54.1	4855 4105
70	1.6	0.8	2.7	57.0	5990	4870	1.6	2x0.5	2.8	57.8	5815 4690
95	1.6	0.8	2.8	61.2	7170	5600	1.6	2x0.5	3.0	62.2	7010 5435
120	1.7	0.8	2.9	65.1	8340	6320	1.7	2x0.5	3.1	66.1	8170 6145
150	1.8	0.8	3.0	68.3	9440	6955	1.8	2x0.5	3.2	69.3	9260 6770
185	1.8	0.8	3.2	72.8	10990	7880	1.8	2x0.5	3.3	73.6	10760 7650
240	1.9	0.8	3.3	78.3	13370	9155	1.9	2x0.5	3.4	79.1	13120 8900
300	2.0	0.8	3.5	83.7	15760	10460	2.0	2x0.8	3.6	86.0	16360 11070
400	2.1	0.8	3.7	90.5	19050	12260	2.1	2x0.8	3.9	93.0	19750 12960
500	2.2	0.8	3.9	98.2	23160	14430	2.2	2x0.8	4.1	100.7	23900 15190

Electrical Data

Nom - Cross - Sectio n Area	D C Resistan ce CU / AL	A C Resistan ce CU / AL	Short Circuit Rating of Conduct or CU / AL 1 sec	Capacitan ce	Chargi ng Current	Sho rt Circui t Ratin g of Copp er Wire Scree n Per Core 1 sec	Short Circui t Ratin g of Copp er Tape Scree n Per Core 1 sec	Reactan ce	Inductan ce
mm ²	μΩm	μΩ/m	kA	pF/m	mA/m	kA	kA	μΩm	nH/m
25	727/1200	927/1538	3.6/2.3	176	0.48	2.6	0.6	132	410
35	524/868	668/1113	5.0/3.2	193	0.53	2.6	0.6	123	390
50	387/641	494/822	6.8/4.4	211	0.58	2.6	0.7	116	370
70	268/443	343/568	9.8/6.3	240	0.65	2.6	0.7	110	350
95	193/320	248/410	13.3/8.5	267	0.73	2.6	0.8	105	330
120	153/253	196/325	17.2/11.0	291	0.79	2.6	0.8	102	320
150	124/206	159/265	21.2/13.5	312	0.85	4.3	0.9	98	310

185	99.1/164	128/211	26.6/17.0	340	0.93	4.3	0.9	95	300
240	75.4/125	98/161	34.9/22.3	375	1.02	4.3	1.0	91	290
300	60.1/100	80/130	43.8/28.0	411	1.12	4.3	1.1	89	280
400	47.0/77.8	64/102	57.3/36.6	454	1.24	5.8	1.2	84	270
500	36.6/60.5	51/81	72.3/46.2	504	1.34	5.8	1.3	78	250

Three Core 12/20KV (Um=24KV) Dimensional Data

Nom. Cross Secti on Area	Nom. Insulati on Thickn ess	Copper Tape Thickn ess	Copp er Wire Scree n Area *	Unarmoured Cables				Steel Round-Wire Armoured Cables					
				Nom. Sheath Thickn ess	Appro x. Overall Diamet er	CU	AL	Nom. Beddin g Thickn ess	Armo ur Wire Size	Nom. Sheath Thickn ess	Appro x. Overall Diamet er	CU	AL
mm ²	mm	mm	mm ²	mm	mm	kg/km		mm	mm	mm	mm	kg/km	
35	5.5	0.1	16	2.7	51	285 0	218 0	1.5	2.5	2.9	60	570 0	501 0
50	5.5	0.1	16	2.8	54	334 0	245 0	1.6	2.5	3.0	62	637 0	548 0
70	5.5	0.1	16	2.9	58	415 0	285 0	1.6	2.5	3.1	66	737 0	607 0
95	5.5	0.1	16	3.0	62	511 0	331 0	1.7	3.15	3.3	72	940 0	760 0
120	5.5	0.1	16	3.1	65	599 0	373 0	1.8	3.15	3.4	75	105 30	827 0
150	5.5	0.1	25	3.2	68	698 0	418 0	1.8	3.15	3.5	80	118 00	894 0
185	5.5	0.1	25	3.3	72	824 0	474 0	1.9	3.15	3.7	83	133 50	985 0
240	5.5	0.1	25	3.6	79	103 10	570 0	2.0	3.5	3.8	90	164 30	118 20
300	5.5	0.1	25	3.7	84	123 60	657 0	2.1	3.5	4.0	95	188 70	130 80
400	5.5	0.1	35	3.9	91	152 20	783 0	2.2	4.0	4.3	103	232 60	159 30
500	5.5	0.1	35	4.1	97	191 05	103 25	2.3	4.2	4.5	110	278 00	191 70

*Optional wire screen can be provided in combination of copper tapes. Nominal screen area, as stated in the table, can be supplied as standard.

Nom. Cross - Secti on Area	Steel Flat Wire Armoured Cables						Double Steel Tape Armoured Cables					
	Nom. Beddin g Thickne ss	Armo ur Wire Size	Nom.She ath Thicknes s	Approx Overall Diamet er	Approx. Weight		Nom. Beddin g Thickne ss	No of Steel tapes x nom tape thickne ss	Nom. Sheath Thickne ss	Approx Overall Diamet er	Approx. Weight	
	mm ²	mm	mm	mm	kg/km		mm	mm	mm	mm	kg/km	
35	1.5	0.8	2.7	55.7	5150	4530	1.5	2x0.5	2.8	56.5	4975	4355
50	1.6	0.8	2.8	58.2	5675	4935	1.6	2x0.5	2.9	59.0	5495	4750
70	1.6	0.8	2.9	61.9	6685	5570	1.6	2x0.5	3.0	62.7	6490	5375
95	1.7	0.8	3.0	66.4	7945	6390	1.7	2x0.5	3.1	67.2	7735	6180
120	1.8	0.8	3.1	70.0	9110	7103	1.8	2x0.5	3.2	70.8	8890	6880
150	1.8	0.8	3.2	73.2	10240	7770	1.8	2x0.5	3.3	74.0	10010	7535
185	1.9	0.8	3.3	77.7	11840	8750	1.9	2x0.5	3.4	78.5	11600	8500
240	2.0	0.8	3.5	83.2	14270	10070	2.0	2x0.8	3.6	85.5	14870	10680
300	2.1	0.8	3.6	88.6	16730	11440	2.1	2x0.8	3.8	91.1	17400	12130
400	2.2	0.8	3.9	95.6	20130	13350	2.2	2x0.8	4.0	97.9	20820	14050
500	2.3	0.8	4.1	103.3	24310	15600	2.3	2x0.8	4.2	105.6	25050	16350

Electrical Data

Nom - Cross- Sectio n Area	D C Resistanc e CU / AL	A C Resistanc e CU / AL	Short Circuit Rating of Conduct or CU / AL 1 sec	Capaci tance	Chargin g Current	Short Circui t Rating of Coppe r Wire Scree n Per Core 1 sec	Short Circui t Rating of Coppe r Tape Scree n Per Core 1 sec	Reactan ce	Inductan ce
mm ²	μΩ/m	μΩ/m	kA	pF/m	mA/m	kA	kA	μΩ/m	nH/m
35	524/868	668/1113	5.0/3.2	168	0.67	2.6	0.7	129	410

50	387/641	494/822	6.8/4.4	183	0.73	2.6	0.8	122	390
70	268/443	343/568	9.8/6.3	207	0.83	2.6	0.8	115	370
95	193/320	248/410	13.3/8.5	229	0.92	2.6	0.9	110	350
120	153/253	196/325	17.2/11.0	249	1.00	2.6	0.9	106	340
150	124/206	159/265	21.2/13.5	266	1.06	4.3	1.0	103	330
185	99.1/164	128/211	26.6/17.0	289	1.16	4.3	1.0	100	320
240	75.4/125	98/161	34.9/22.3	318	1.27	4.3	1.1	95	300
300	60.1/100	80/130	43.8/28.0	348	1.39	4.3	1.2	93	290
400	47.0/77.8	64/102	57.3/36.6	388	1.53	5.8	1.3	87	280
500	36.6/60.5	51/81	72.3/46.2	422	1.67	5.8	1.4	78	250

Three Core 18/30KV (Um=36KV) Dimensional Data

Nom. Cross Secti on Area	Nom.Insul ation Thickness	Cop per Wire Tape Thickn ess	Cop per Wire Scre en Area *	Unarmoured Cables				Steel Round-Wire Armoured Cables					
				Nom. Sheat h Thickn ess	Appro x. Overa ll Diam eter	Approx. Weight	Nom. Beddin g Thickn ess	Arm our Wire Size	Nom.Sh eath Thickne ss	Appro x. Overa ll Diam eter	CU	AL	CU
mm ²	mm	mm	mm ²	mm	mm	kg/km	mm	mm	mm	mm	kg/km		
50	8.0	0.1	16	3.2	65	434 0	346 0	1.8	3.15	3.5	75	895 0	808 0
70	8.0	0.1	16	3.3	70	522 0	393 0	1.9	3.15	3.6	80	101 50	886 0
95	8.0	0.1	16	3.4	74	624 0	444 0	1.9	3.15	3.7	84	113 90	959 0
120	8.0	0.1	16	3.5	77	718 0	491 0	2.0	3.5	3.8	89	132 00	108 60
150	8.0	0.1	25	3.6	80	822 0	542 0	2.1	3.5	4.0	92	145 20	117 20
185	8.0	0.1	25	3.7	84	954 0	604 0	2.1	4.0	4.1	97	170 20	135 10
240	8.0	0.1	25	3.9	91	117 20	711 0	2.2	4.0	4.3	104	198 10	152 00
300	8.0	0.1	25	4.0	95	137 90	800 0	2.3	4.5	4.5	108	233 10	174 70
400	8.0	0.1	35	4.3	103	168 20	943 0	2.4	4.5	4.7	117	270 10	196 20
500	8.0	0.1	35	4.5	110	215 50	128 80	2.5	4.5	4.9	124	311 30	226 10

*Optional wire screen can be provided in combination of copper tapes. Nominal screen area, as stated in the table, can be supplied as standard.

Nom. Cross - Secti on Area	Steel Flat Wire Armoured Cables						Double Steel Tape Armoured Cables					
	Nom. Bedding Thickne ss	Armo ur Wire Size	Nom. Sheath Thickne ss	Approx . Overall Diamet er	CU	AL	Nom. Bedding Thickne ss	No of Steel tapes x nom tape thickne ss	Nom. Sheath Thickne ss	Approx . Overall Diamet er	CU	AL
mm ²	mm	mm	mm	mm	kg/km		mm	mm	mm	mm	kg/km	
50	1.8	0.8	3.1	70.2	7490	6775	1.8	2x0.5	3.3	71.2	7300	6585
70	1.9	0.8	3.2	74.0	8590	7540	1.9	2x0.5	3.4	75.0	8390	7335
95	1.9	0.8	3.4	78.5	9990	8460	1.9	2x0.5	3.5	79.3	9740	8210
120	2.0	0.8	3.5	82.2	11250	9270	2.0	2x0.8	3.6	84.5	11845	9875
150	2.1	0.8	3.6	85.6	12510	10070	2.1	2x0.8	3.7	87.9	13120	10700
185	2.1	0.8	3.7	89.8	14155	11100	2.1	2x0.8	3.9	92.3	14850	11800
240	2.2	0.8	3.8	95.4	16740	12575	2.2	2x0.8	4.0	97.9	17480	13320
300	2.3	0.8	4.0	100.9	19310	14120	2.3	2x0.8	4.2	103.4	20080	14900
400	2.4	0.8	4.2	107.8	22840	16170	2.4	2x0.8	4.4	110.3	23660	17000
500	2.5	0.8	4.4	115.5	27200	18610	2.5	2x0.8	4.6	118.0	28080	19510

Electrical Data

Nom. Cross- Sectio n Area	D C Resistanc e CU / AL	A C Resistanc e CU / AL	Short Circuit Rating of Conduct or CU / AL 1 sec	Capacitanc e	Chargin g Current	Short Circuit Rating of Coppe r Wire Scree n Per Core 1 sec	Short Circuit Rating of Coppe r Tape Scree n Per Core 1 sec	Reactanc e	Inductanc e
mm ²	μΩ/m	μΩ/m	kA	pF/m	mA/m	kA	kA	μΩ/m	nH/m

50	387/641	494/822	6.8/4.4	142	0.85	2.6	1.0	134	430
70	268/443	343/568	9.8/6.3	159	0.95	2.6	1.0	127	400
95	193/320	248/410	13.3/8.5	175	1.05	2.6	1.1	121	390
120	153/253	196/325	17.2/11.0	189	1.13	2.6	1.1	117	370
150	124/206	159/265	21.2/13.5	201	1.21	4.3	1.2	113	360
185	99.1/164	128/211	26.6/17.0	217	1.3	4.3	1.2	109	350
240	75.4/125	98/161	34.9/22.3	237	1.42	4.3	1.3	104	330
300	60.1/100	80/130	43.8/28.0	258	1.55	4.3	1.4	101	320
400	47.0/77.8	64/102	57.3/36.6	282	1.69	5.8	1.5	96	290
500	36.6/60.5	51/81	72.3/46.2	302	1.79	5.8	1.6	78	250

Three Core 21/35KV (Um=42KV) Dimensional Data

Nom. Cross Section Area	Unarmoured Cables						Steel Round-Wire Armoured Cables						
	Nom.Insula tion Thickness	Copper Tape Thickness	Cop per Wire Scre en Area *	Nom. Sheath Thickness	Appro x. Overa ll Diamet er	Approx. Weight	Nom. Beddin g Thickness	Arm our Wire Size	Nom. Sheath Thickness	Appro x. Overa ll Diamet er	Approx. Weight		
mm ²	mm	mm	mm ²	mm	kg/km	CU	AL	mm	mm	mm	kg/km		
50	9.3	0.1	16	3.2	73.9	532 0	444 6	1.9	3.15	3.8	87.1	109 70	100 90
70	9.3	0.1	16	3.3	78.0	616 6	488 0	2.0	3.5	3.9	91.3	122 20	107 50
95	9.3	0.1	16	3.5	81.9	714 4	543 0	2.1	3.5	4.0	94.5	135 60	117 80
120	9.3	0.1	16	3.6	85.1	823 2	604 9	2.1	4.0	4.1	97.5	148 80	136 50
150	9.3	0.1	25	3.7	88.6	927 3	654 9	2.1	4.0	4.2	100.5	161 50	140 60
185	9.3	0.1	25	3.8	93.5	108 45	739 2	2.2	4.0	4.3	105.5	178 40	143 90
240	9.3	0.1	25	4.0	98.2	126 75	831 0	2.3	4.5	4.5	111.5	204 10	158 70
300	9.3	0.1	25	4.1	103.6	149 60	936 2	2.4	4.5	4.6	116.5	241 00	184 60
400	9.3	0.1	35	4.3	110.0	180 55	106 98	2.5	4.5	4.8	124.3	286 80	205 60

*Optional wire screen can be provided in combination of copper tapes. Nominal screen area, as stated in the table, can be supplied as standard.

Nom. Cross - Secti on Area	Steel Flat Wire Armoured Cables						Double Steel Tape Armoured Cables					
	Nom. Beddin g Thickne ss	Armo ur Wire Size	Nom.She ath Thicknes s	Approx .Overall Diamet er	Approx. Weight		Nom. Beddin g Thickne ss	No of Steel tapes x nom tape thickne ss	Nom.She ath Thicknes s	Approx .Overall Diamet er	Approx. Weight	
	mm ²	mm	mm	mm	mm	kg/km	mm	mm	mm	mm	kg/km	
50	1.9	0.8	3.3	80.5	982 5	898 6	1.9	2x0.5	3.5	82.5	962 5	878 6
70	2.0	0.8	3.6	85.5	110 15	976 9	2.0	2x0.8	3.8	87.6	108 25	956 9
95	2.1	0.8	3.8	88.5	123 60	105 80	2.1	2x0.8	3.9	90.5	121 16	103 27
120	2.1	0.8	3.9	91.5	139 00	117 15	2.1	2x0.8	4.0	94.5	133 06	111 10
150	2.1	0.8	4.0	94.8	151 60	124 40	2.1	2x0.8	4.1	97.5	145 50	118 30
185	2.2	0.8	4.1	99.5	175 00	134 50	2.2	2x0.8	4.2	101.7	168 10	127 65
240	2.3	0.8	4.2	104.1	193 90	148 90	2.3	2x0.8	4.4	107.5	186 50	141 50
300	2.4	0.8	4.4	109.5	219 70	162 80	2.4	2x0.8	4.6	112.8	212 00	155 00
400	2.5	0.8	4.6	116.3	256 00	184 30	2.5	2x0.8	4.8	118.8	247 80	176 00

Electrical Data

Nom. Cross- Sectio n Area	D C Resistanc e CU / AL	A C Resistanc e CU / AL	Short Circuit Rating of Conduct or CU / AL 1 sec	Capacitanc e	Chargin g Current	Short Circuit Rating of Coppe r Wire Scree n Per Core 1 sec	Short Circuit Rating of Coppe r Tape Scree n Per Core 1 sec	Reactanc e	Inductanc e

mm ²	μΩ/m	μΩ/m	kA	pF/m	mA/m	kA	kA	μΩ/m	nH/m
50	387/641	494/822	6.8/4.4	135	0.91	2.6	1.1	140	450
70	268/443	343/568	9.8/6.3	151	1.01	2.6	1.1	134	415
95	193/320	248/410	13.3/8.5	166	1.11	2.6	1.2	126	405
120	153/253	196/325	17.2/11.0	179	1.21	2.6	1.2	123	385
150	124/206	159/265	21.2/13.5	189	1.29	4.3	1.3	118	375
185	99.1/164	128/211	26.6/17.0	202	1.38	4.3	1.3	114	365
240	75.4/125	98/161	34.9/22.3	221	1.49	4.3	1.4	109	345
300	60.1/100	80/130	43.8/28.0	240	1.65	4.3	1.5	105	335
400	47.0/77.8	64/102	57.3/36.6	267	1.75	5.8	1.6	101	305

Three Core 26/35KV (Um=42KV) Dimensional Data

Nom. Cross- Section Area	Unarmoured Cables						Steel Round-Wire Armoured Cables						
	Nom.Insula- tion Thickness	Cop- per Wire Tape Thickn- ess	Cop- per Wire Scree- n Area *	Nom. Sheath Thickn- ess	Appro- x. Overa- ll Dia- me- ter	CU	AL	Nom. Beddin- g Thickn- ess	Arm- our Wire Size	Nom. Sheath Thickn- ess	Appro- x. Overa- ll Dia- me- ter	CU	AL
								Approx. Weight		Approx. Weight			
mm ²	mm	mm	mm ²	mm	mm	kg/km		mm	mm	mm	mm	kg/km	
50	10.5	0.1	16	3.4	79.7	592	505	1.9	3.5	4.0	93.5	120	111
						8	3					50	50
70	10.5	0.1	16	3.5	83.6	690	563	2.0	4.0	4.1	97.5	131	118
						0	4					50	50
95	10.5	0.1	16	3.6	87.2	786	613	2.1	4.0	4.2	101.5	148	129
						3	1					00	50
120	10.5	0.1	16	3.8	90.7	881	663	2.2	4.0	4.4	105.5	160	138
						7	4					50	00
150	10.5	0.1	25	3.9	94.1	100	736	2.3	4.5	4.5	108.5	174	146
						85	1					20	40
185	10.5	0.1	25	4.0	99.1	115	812	2.3	4.5	4.6	112	192	157
						73	0					00	00
240	10.5	0.1	25	4.1	103.6	133	902	2.4	4.5	4.7	117	210	168
						87	3					50	00
300	10.5	0.1	25	4.3	109.2	156	100	2.5	4.5	4.8	122.5	249	191
						58	60					00	00
400	10.5	0.1	35	4.5	115.6	190	116	2.6	4.5	5.1	129	292	215
						13	57					00	60

*Optional wire screen can be provided in combination of copper tapes. Nominal screen area, as stated in the table, can be supplied as standard.

Nom. Cross - Secti on Area	Steel Flat Wire Armoured Cables						Double Steel Tape Armoured Cables					
	Nom. Beddin g Thickne ss	Armo ur Wire Size	Nom.She ath Thicknes s	Approx Overall Diamet er	Approx. Weight		Nom. Beddin g Thickne ss	No of Steel tapes x nom tape thickne ss	Nom.She ath Thicknes s	Approx Overall Diamet er	Approx. Weight	
	mm ²	mm	mm	mm	kg/km		mm	mm	mm	mm	kg/km	
50	1.9	0.8	3.5	86.5	108 80	999 0	1.9	2x0.8	3.7	87.5	106 90	980 0
70	2.0	0.8	3.6	90.5	120 00	107 95	2.0	2x0.8	3.8	91.4	108 00	105 90
95	2.1	0.8	3.8	94.0	133 60	115 70	2.1	2x0.8	3.9	95.2	131 10	113 27
120	2.2	0.8	3.9	96.4	137 05	127 10	2.2	2x0.8	4.0	98.7	143 00	121 10
150	2.3	0.8	4.0	99.5	161 60	134 40	2.3	2x0.8	4.1	102.1	155 50	128 00
185	2.3	0.8	4.1	105.1	185 05	144 65	2.3	2x0.8	4.2	107.3	178 10	137 65
240	2.4	0.8	4.2	109.8	203 90	158 90	2.4	2x0.8	4.4	112.2	196 50	151 50
300	2.5	0.8	4.4	115.5	229 70	172 80	2.5	2x0.8	4.6	118.0	222 00	165 00
400	2.6	0.8	4.6	122.1	266 00	194 30	2.6	2x0.8	4.8	124.6	257 80	186 00

Electrical Data

Nom. Cross- Section Area	D C Resistance CU / AL	A C Resistance CU / AL	Short Circuit Rating of Conductor CU / AL 1 sec	Capacitance	Charging Current	Short Circuit Rating of Copper Wire Screen Per Core 1 sec	Short Circuit Rating of Copper Tape Screen Per Core 1 sec	Reactance	Inductance
mm ²	μΩ/m	μΩ/m	kA	pF/m	mA/m	kA	kA	μΩ/m	nH/m
50	387/641	494/822	6.8/4.4	131	0.97	2.6	1.2	146	470
70	268/443	343/568	9.8/6.3	145	1.07	2.6	1.2	139	430
95	193/320	248/410	13.3/8.5	158	1.18	2.6	1.3	132	420

120	153/253	196/325	17.2/11.0	169	1.26	2.6	1.3	128	400
150	124/206	159/265	21.2/13.5	178	1.36	4.3	1.4	123	390
185	99.1/164	128/211	26.6/17.0	185	1.44	4.3	1.4	118	380
240	75.4/125	98/161	34.9/22.3	203	1.57	4.3	1.5	113	360
300	60.1/100	80/130	43.8/28.0	219	1.72	4.3	1.6	109	350
400	47.0/77.8	64/102	57.3/36.6	245	1.85	5.8	1.7	105	320

Current Rating for Three Core 1.8/3KV(Um=7.2)KV to 26/35KV(Um=42KV) XLPE Insulation

Nom. Cross-Section Area	Unarmored						Armored					
	Buried direct in Ground		Laid in Single Way Duct		Laid in Air		Buried direct in Ground		Laid in Single Way Duct		Laid in Air	
	CU	AL	CU	AL	CU	AL	CU	AL	CU	AL	CU	AL
mm ²	A		A		A		A		A		A	
10	76	53	62	42	87	62	76	53	63	43	88	63
16	101	78	87	67	109	84	101	78	88	68	110	85
25	129	100	112	87	142	110	129	100	112	87	143	111
35	153	119	133	103	170	132	154	119	134	104	172	133
50	181	140	158	122	204	158	181	140	158	123	205	159
70	221	171	193	150	253	196	220	171	194	150	253	196
95	262	203	231	179	304	236	263	204	232	180	307	238
120	298	232	264	205	351	273	298	232	264	206	352	274
150	334	260	297	231	398	309	332	259	296	231	397	309
185	377	294	336	262	455	355	374	293	335	262	453	354
240	434	340	390	305	531	415	431	338	387	304	529	415
300	489	384	441	346	606	475	482	380	435	343	599	472
400	553	438	501	398	696	552	541	432	492	393	683	545
500	613	498	541	451	786	652	601	492	532	446	773	645
630	663	568	591	501	896	762	651	562	582	496	883	755

Current Rating for Three Core 1.8/3KV(Um=7.2)KV to 26/35KV(Um=42KV) EPR Insulation

Nom. Cross-Section Area	Unarmored						Armored					
	Buried direct in Ground		Laid in Single Way Duct		Laid in Air		Buried direct in Ground		Laid in Single Way Duct		Laid in Air	
	CU	AL	CU	AL	CU	AL	CU	AL	CU	AL	CU	AL
mm ²	A		A		A		A		A		A	
10	73	51	59	40	82	58	73	51	60	41	82	59
16	98	76	84	65	104	80	98	76	85	66	104	81
25	125	97	109	84	135	105	125	97	109	85	136	105
35	150	116	130	101	164	127	150	116	131	101	164	127
50	176	137	154	119	195	151	177	137	155	120	197	153

70	216	167	189	147	243	189	216	168	190	147	244	190
95	258	200	227	176	296	229	257	200	227	176	296	230
120	292	227	258	201	339	263	292	227	259	201	339	264
150	328	255	291	226	385	299	327	254	291	226	385	300
185	371	289	330	257	441	343	368	288	328	257	439	343
240	429	335	384	300	519	406	424	332	381	299	513	402
300	482	378	434	340	590	462	475	374	429	338	583	459
400	545	432	494	392	678	538	534	426	485	387	666	530
500	605	492	534	445	768	638	594	486	525	440	756	630
630	655	562	584	495	878	749	644	556	575	490	862	741

Current Rating Conditions:

Ground Temperature: 20°C Ambient Temperature (air): 30°C Depth of Soil: 0.8 m Thermal Resistance of Soil: 1.5K•m/W