


Type G-GC Three-Conductor Portable Power Cable 2kV

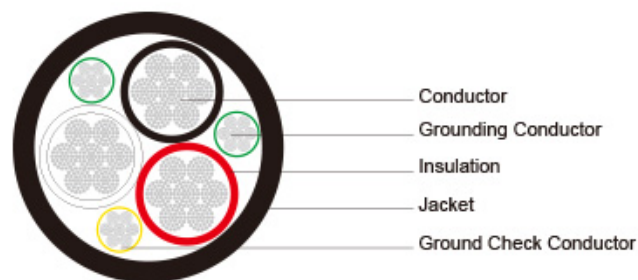

Applications	These cables are suitable for use with mobile mining equipment such as continuous miners, drills, cutters, loading machines, AC shuttle cars and pumps. Type G-GC is for applications where grounding conductors and a ground check conductor are required.	
Standards	ICEA S-75-381/NEMA WC 58 ASTM B 172 ASTM B 33 CAN/CSA C22.2 No. 96	
Construction		
Conductors	Stranded annealed tinned copper conductor.	
Insulation	Ethylene Propylene Rubber (EPR).	
Ground Check Conductor	Tinned copper conductor with a yellow insulation.	
Grounding Conductor	Tinned copper conductor with an optional green outer covering.	
Jacket	Reinforced heavy-duty/extra-heavy-duty Chlorinated Polyethylene (CPE), black. (Cables having a nominal outside diameter of more than 2.0 inches require extra-heavy-duty jackets.)	
Options	Other jacket materials such as CSP/PCP/NBR/PVC are available upon request. Two-layer jacket with reinforcing fibre between the two layers can be offered as an option.	
Mechanical and Thermal Properties	Minimum Bending Radius: 6×OD Maximum Operating Temperature: +90°C	

Dimensions and Weight:

Construction	No. of Strands	Grounding Conductor or Size	Ground Check Conductor or Size	Nominal Insulation Thickness		Nominal Jacket Thickness		Nominal Overall Diameter		Nominal Weight		Ampacity
No. of cores×AWG/kc mil	-	AWG/kc mil	AWG/kc mil	inch	mm	inch	mm	inch	mm	lbs/ft	kg/m	A
3×8	133	10	10	0.06	1.5	0.125	3.2	0.97	24.6	600	893	59

3×6	133	10	10	0.06	1.5	0.14 0	3.6	1.0 5	26. 7	735	1094	79
3×4	259	8	10	0.06	1.5	0.15 5	3.9	1.1 9	30. 2	1065	1585	104
3×3	259	8	10	0.06	1.5	0.15 5	3.9	1.2 5	31. 8	1245	1853	120
3×2	259	7	10	0.06	1.5	0.15 5	3.9	1.3 4	34. 0	1480	2202	138
3×1	259	6	8	0.08	2.0	0.17 0	4.3	1.5 1	38. 4	1885	2805	161
3×1/0	266	5	8	0.08	2.0	0.17 0	4.3	1.6 5	41. 9	2290	3408	186
3×2/0	329	4	8	0.08	2.0	0.19 0	4.8	1.7 5	44. 5	2710	4033	215
3×3/0	418	2	8	0.08	2.0	0.19 0	4.8	1.8 9	48. 0	3270	4866	249
3×4/0	532	2	8	0.08	2.0	0.20 5	5.2	2.0 4	51. 8	3975	5915	287
3×250	627	2	6	0.09 5	2.4	0.22 0	5.6	2.3 9	60. 7	4950	7366	320
3×350	888	1/0	6	0.09 5	2.4	0.23 5	6.0	2.6 8	68. 1	6625	9859	394
3×500	1221	2/0	6	0.09 5	2.4	0.25 0	6.4	3.0 3	77. 0	8890	1323 0	487

Ampacity-Based on a conductor temperature of 90°C and an ambient air temperature of 40°C, per ICEA S-75-381